

LED Recessed Fluourescent




TIS LRLIP/DL

Application

This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification


Housing	Die-formed cold roll steel
Finishing	Powder coated in grey (white as option)
Reflector	Mirror anodized aluminium
Diffuser	Opal Acrylic
Mounting	Recessed
Power	2L:28-40W (2 lamps) 1x1DL:6W (1 lamp) 1x2DL:12W (2 lamps) 2x1DL:12W (2 lamps) 2x2DL:24W (4 lamps)
Source	LED-T8 LED-MR16
Lamp Holder	G13 for LED-T8, GU5.3 for LED-MR16
Lamp Colour	3000/4000/6500K
Lamp Output	2L:L&E : 2x14/18W:2x2100 lm 2L:LUMAX : 2x18W:2x2100 lm LED MR16:6W:2700/4000/6000K:550lm
Luminaire Output	2L: 28/36W : 1810 lm
Power Supply	220VAC 50Hz
IP Rating	40
LED Lifetime	LUMAX:25,000 hrs. L&E:MR16:15,000/T8:25,000/50,000hrs.
Equivalent	28-40W:T5 2x28W/T8 2x36W 50W:MR16 1x6W 100W:MR16 2x6W 200W:MR16 4x6W

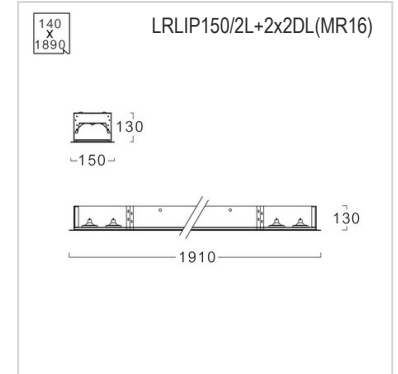

Ordering Data

Model	Watt
LRLIP150/2L+1X1DL(MR16)	28-40W+1X6W
LRLIP150/2L+1X2DL(MR16)	28-40W+2X6W
LRLIP150/2L+2X1DL(MR16)	28-40W+2X6W
LRLIP150/2L+2X2DL(MR16)	28-40W+4X6W

Related Products

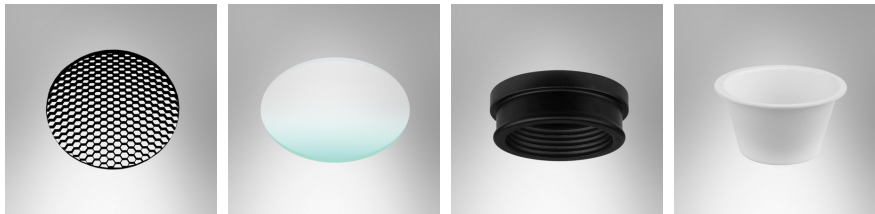

Honey comb

Frosted glass

Anti glare

Hood



LED-T8

LED-T8

LED-MR16

