

LED Recessed Fluorescent



RMPL

Application



This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification


Housing	Extruded Plastic
Finishing	White
Diffuser	Clear Acrylic
Mounting	Recessed T-bar
Power	40W
Source	LED Module
Lamp Colour	4000/5000K
Luminaire Output	4000/4000 lm
Control Gear	Separate driver
Power Supply	220VAC 50Hz
IP Rating	40
Luminaire Lifetime	30,000 hrs.
Equivalent	T5 2x28W/T8 2x36W

Ordering Data

Model	Watt
RMPL300/L-40LED	40W
RMPL600/S-40LED	40W

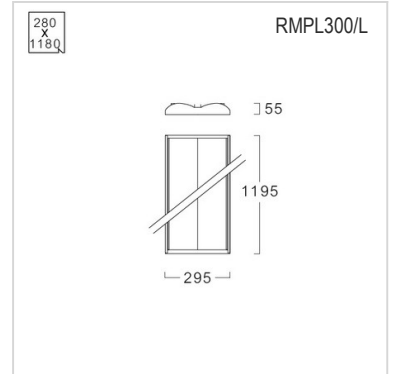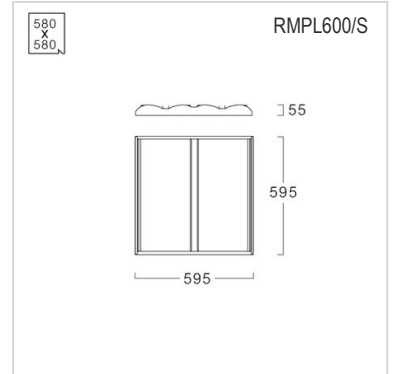

Related Products

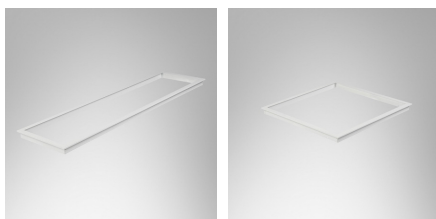

30*120 Frame Plaster Ceiling

60*60 Frame Plaster Ceiling

