



ZENSE Smart Driver(CC) 30W

- Wireless smart control by L&E Application "Zense+"
- Bluetooth mesh Protocol, Low power consumption
- Maximum 15m operating range between each nodes
- Constant output current (Selectable by Dip switch)

Output Current	Output Voltage	Output Current	Output Voltage
250mA	8-48V	650mA	8-46V
300mA	8-48V	700mA	8-43V
350mA	8-48V	750mA	8-40V
400mA	8-48V	800mA	8-37V
450mA	8-48V	850mA	8-35V
500mA	8-48V	900mA	8-33V
550mA	8-48V	950mA	8-31V
600mA	8-48V	1000mA	8-30V


Specification

Model	ZDG2-2C-BT-SR-CC-30-TW-ID-IA
Power Input	200-240Vac, 50/60Hz
Output Voltage	8-48Vdc
Output Current	250-1000mA
Output Channel	2
Rated Power	30W
Power Factor	> 0.95 @Full Load
Efficiency	87% @Full Load
THDi	< 15% @Full Load
Dimmable Range	1-100%
IP Rating	IP20
Cover	Milky/ Polycarbonate
Operating Temperature	-20 ~ +45°C
Dimension	170x53.4x28mm




ZENSE Smart Driver(CC) 30W


Dimensions (mm)

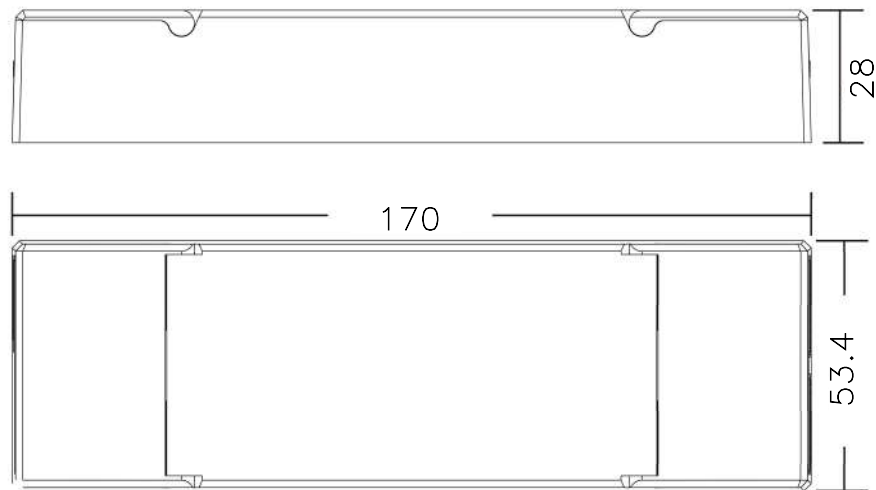

Wiring Diagram

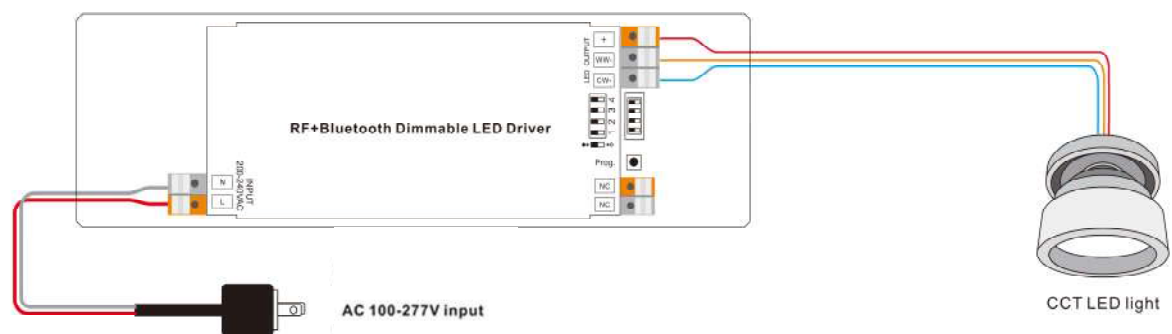

Dial Switch Definition



	1	2	3	4
250mA	●	●	●	●
300mA	●	●	●	○
350mA	●	●	○	●
400mA	●	●	○	○
450mA	●	○	●	●
500mA	●	○	○	○
550mA	●	○	○	●
600mA	●	○	○	○

	1	2	3	4
650mA	○	●	●	●
700mA	○	●	●	○
750mA	○	●	○	●
800mA	○	●	○	○
850mA	○	○	●	●
900mA	○	○	○	○
950mA	○	○	○	●
1000mA	○	○	○	○