

LED Surface Square/Multi Downlight



TIS SSDL91

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-formed aluminium
Finishing	Powder coated in white or black
Mounting	Surface
Power	10W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	10W : 1120/1215/1290 lm
Luminaire Output	10W : 926/1000/1083 lm
Beam Angle	55 degree
UGR	<19
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	10W : PAR30 50W

Ordering Data

Model	Watt
SSDL91/WH-10LED	10W

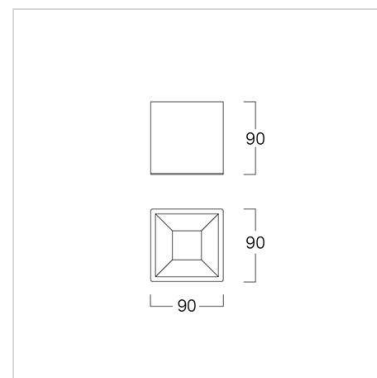

Related Products



SSDL91/BK



SDL91-10W



SDL111-14/20W



SDL131-14/20/23W



SDL169-130/35/40W



SDL193-44/49W



SSDL111-14/20W



SSDL131-14/20/23W



SSDL161-30/35/40/44/49W

