

LED Pendant



PSAL130

Application

Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing	Printed steel frame and Die-cast aluminium lamp head
Finishing	Powder coated in white / black
Reflector	Anodized aluminium
Mounting	Suspension wire
Power	1 lamp : 23W / 2 lamps : 46W 1 lamp : 30W / 2 lamps : 60W 1 lamp : 35W / 2 lamps : 70W

Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80

Lamp Output	23W : 2635/2845/3090 lm 30W : 3500/3770/4015 lm 35W : 3940/4245/4520 lm
Luminaire Output	23W : 2046/2191/2356 lm* 30W : 2763/2958/3181 lm* 35W : 3081/3231/3547 lm*







Beam Angle	14/24/36/45/60 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	23W : MH 35W 30W : MH 70W 35W : MH 100W

Remarks


*Value at 24 Degree

Ordering Data

Model	Watt
PSAL130/WH-1x23LED	23W
PSAL130/WH-1x30LED	30W
PSAL130/WH-1x35LED	35W
PSAL130/WH-2x23LED	46W
PSAL130/WH-2x30LED	60W
PSAL130/WH-2x35LED	70W

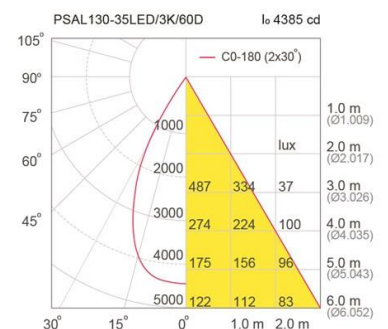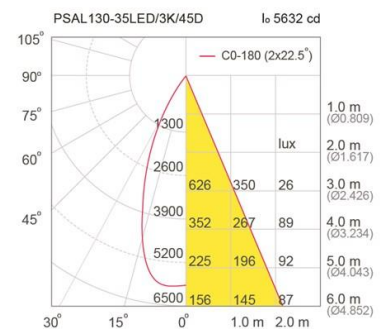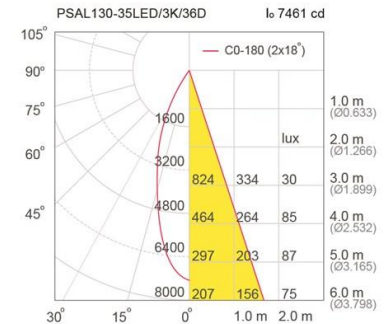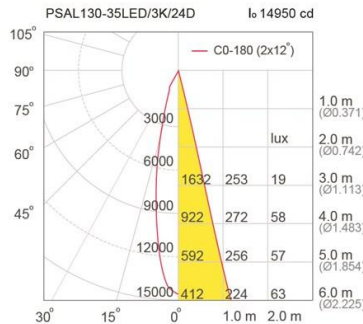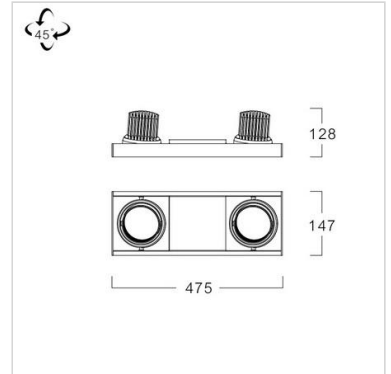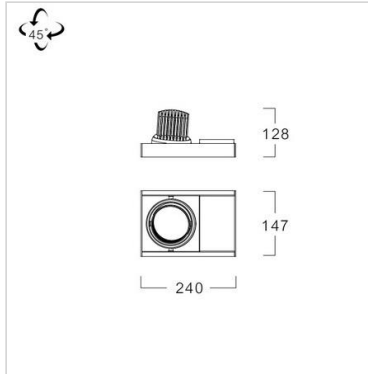

Related Products



Honey comb



Hood



PSAL115-1x14/20/23W






PSAL115-2x14/20/23W

23W




30W

35W




14D






24D



36D



45D



60D

