

LED IP Surface Downlight



ISDL1010

Application






Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in black
Mounting	Ceiling
Power	10W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	1120/1215/1290 lm
Luminaire Output	662/715/761 lm *
Beam Angle	15/24/36/50 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	65
LED Lifetime	40,000 hrs.
Equivalent	10W : PAR30 35W
Remarks	Install on ceiling only * Value at 24 Degree

Ordering Data

Model	Watt
ISDL1010/BK-10LED	10W

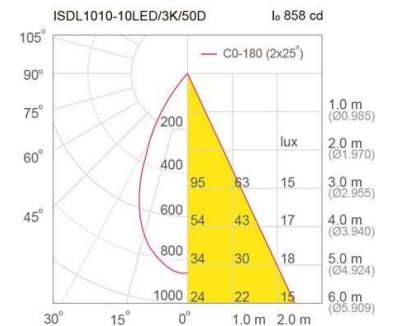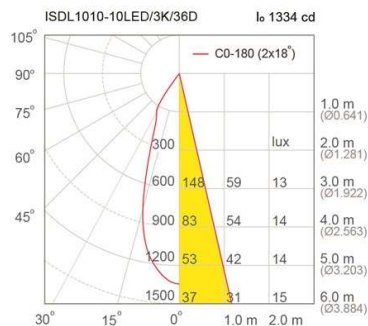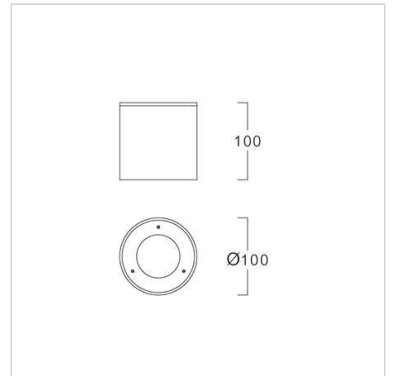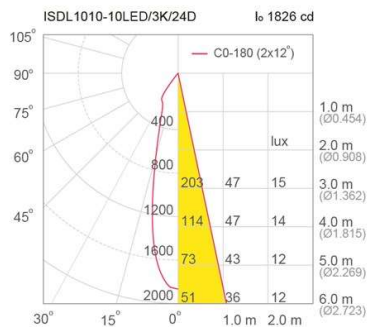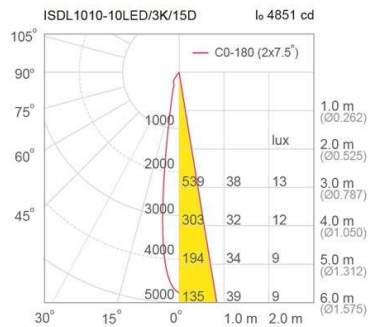

Related Products



ISSL1010-10W



ISDL1515-23/30W



ISSL1515-23/30W



ISDL2020-40/44W



ISSL2020-40/44W