

LED Floodlight / Spotlight



 **SLS042**

Application


Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification

Housing	Die-cast aluminium housing
Front Cover	Tempered glass
Finishing	Grey
Dimension	230x349x485mm.
Weight	17kg
Power	160W
Colour Temperature	2700/3000/4000/6500K
CRI	>80
SDCM	3 Step
Luminaire Output	10640/10640/11380/12380lm
Beam Angle	6/10/16/30/50/16x50 degree
Control Gear	Integral driver
Dimming Method	DMX
Power Supply	220Vac
IP Rating	66
Luminaire Lifetime	50000hrs

Ordering Data

Model	Watt
SLS042/GY-160W-3000K-10D	160W
SLS042/GY-160W-3000K-16D	160W
SLS042/GY-160W-3000K-16x50D	160W
SLS042/GY-160W-3000K-30D	160W
SLS042/GY-160W-3000K-50D	160W
SLS042/GY-160W-3000K-6D	160W

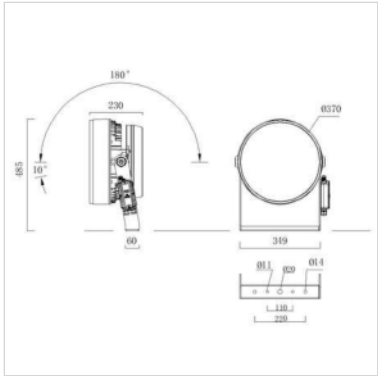

Related Products



Anti glare hood