

LED Floodlight / Spotlight



 **SLS043**

Application


Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification

Housing	Die-cast aluminium housing
Front Cover	Tempered glass
Finishing	Grey
Dimension	239x349x550mm.
Weight	24kg
Power	320W
Colour Temperature	2700/3000/4000/6500K
CRI	>80
SDCM	3 Step
Luminaire Output	21280/21280/22450/22750lm
Beam Angle	6/10/16/30/50/16x50 degree
Control Gear	Integral driver
Dimming Method	DMX
Power Supply	220Vac
IP Rating	66
Luminaire Lifetime	50000hrs

Ordering Data

Model	Watt
SLS043/GY-320W-3000K-10D	320W
SLS043/GY-320W-3000K-16D	320W
SLS043/GY-320W-3000K-16x50D	320W
SLS043/GY-320W-3000K-30D	320W
SLS043/GY-320W-3000K-50D	320W
SLS043/GY-320W-3000K-6D	320W

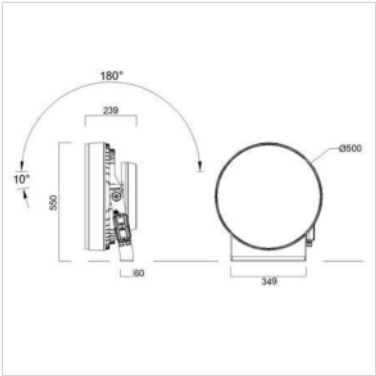

Related Products



Anti glare hood