

LED Pendant



PSAL115

Application

Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing	Printed steel frame and Die-cast aluminium lamp head
Finishing	Powder coated in white / black
Mounting	Suspension wire
Power	1 lamp : 14W / 2 lamps : 28W 1 lamp : 20W / 2 lamps : 40W 1 lamp : 23W / 2 lamps : 46W

Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	14W : 1540/1660/1805 lm 20W : 2200/2370/2575 lm 23W : 2635/2845/3090 lm
Luminaire Output	14W : 1394/1503/1634 lm* 20W : 1873/2019/2195 lm* 23W : 2085/2247/2444 lm*

Beam Angle 15/24/36/60 Degree

Control Gear Built-in driver

Power Supply 220-240VAC, 50Hz

Power Factor >0.9

Insulation Class I

IP Rating 20

Luminaire Lifetime 40,000 hrs







Equivalent 14W : PAR30 75W
20W : MH 20W
23W : MH 35W

Remarks


*Value at 24 Degree

Ordering Data

Model	Watt
PSAL115/BK-1x14LED	14W
PSAL115/BK-1x20LED	20W
PSAL115/BK-1x23LED	23W
PSAL115/BK-2x14LED	28W
PSAL115/BK-2x20LED	40W
PSAL115/BK-2x23LED	46W

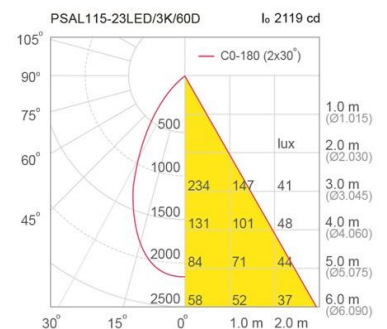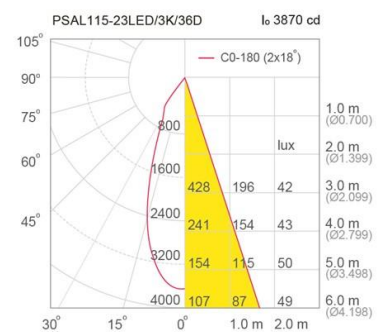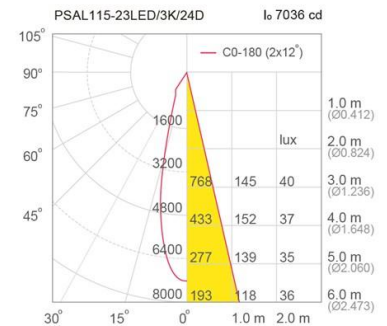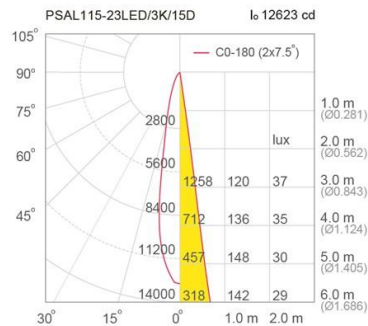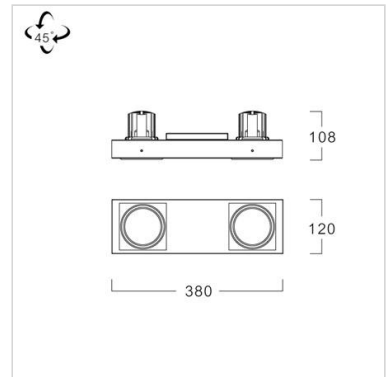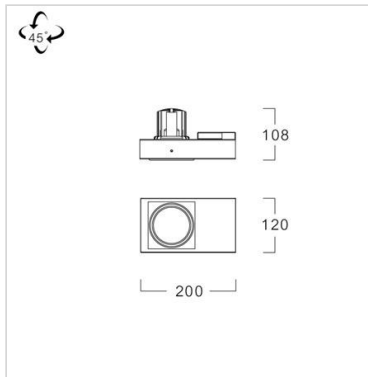

Related Products



Honey comb



Hood



PSAL130-1x23/30/35W






PSAL130-2x23/30/35W

14W




20W

23W




15D

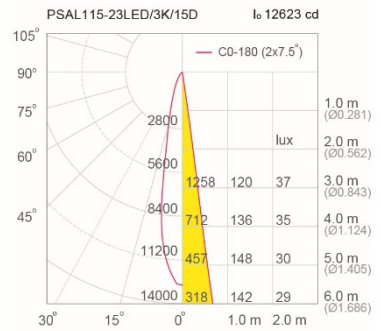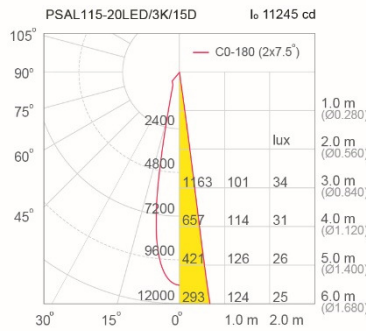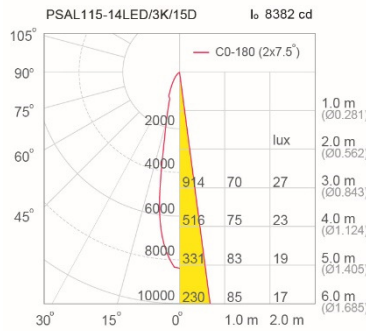

24D

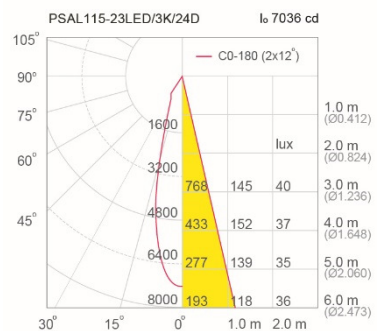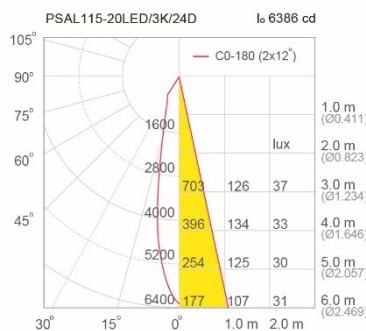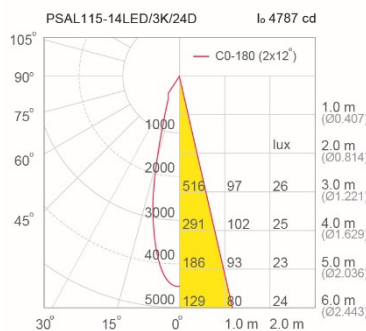

36D

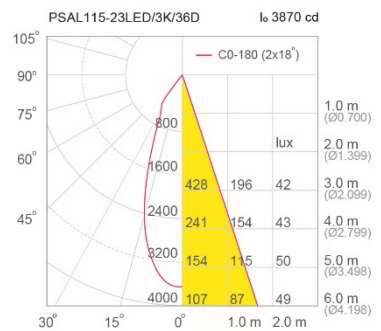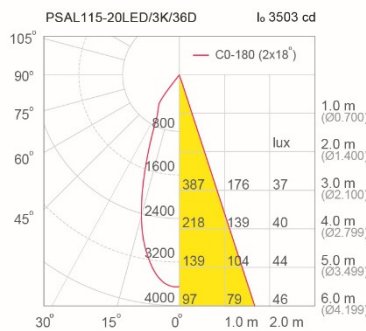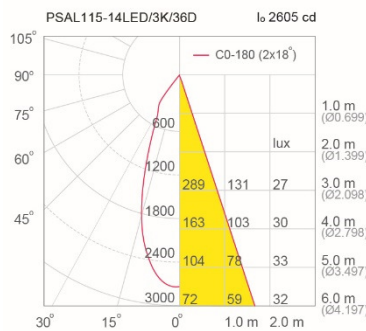

60D

