

LED Surface Downlight



TIS SDL91

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-formed aluminium
Finishing	Powder coated in white or black
Mounting	Surface
Power	10W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	10W : 1120/1215/1290 lm
Luminaire Output	10W : 764/825/894 lm
Beam Angle	65 degree
UGR	<19
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	10W : PAR30 50W

Ordering Data

Model	Watt
SDL91/WH-10LED	10W

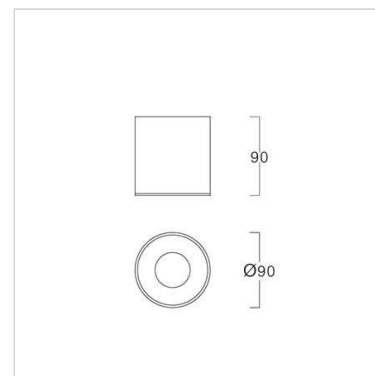

Related Products



SDL91/BK



SDL111-14/20W



SDL131-14/20/23W



SDL169-30/35/40W




SDL193-44/49W



SSDL91-10W



SSDL111-14/20W



SSDL131-14/20/23W



SSDL161-30/35/40/44/49W

