

TIS FS012

Application


Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification

Housing	Die-cast aluminium housing
Front Cover	Tempered glass
Finishing	White/Black
Dimension	200x470x228mm.
Weight	9.15kg
Power	150W
Colour Temperature	2700/3000/4000/6000K
CRI	>80
SDCM	3 Step
Luminaire Output	12000/12000/124500/127500lm
Beam Angle	3/6/12/30/40/60/10x70 degree
Control Gear	Integral driver
Dimming Method	DMX
Power Supply	220Vac
IP Rating	66
Luminaire Lifetime	50000hrs

Ordering Data

Model	Watt
FS012/WH-150W-3000K-10x70D	150W
FS012/WH-150W-3000K-12D	150W
FS012/WH-150W-3000K-30D	150W
FS012/WH-150W-3000K-3D	150W
FS012/WH-150W-3000K-40D	150W
FS012/WH-150W-3000K-60D	150W
FS012/WH-150W-3000K-6D	150W

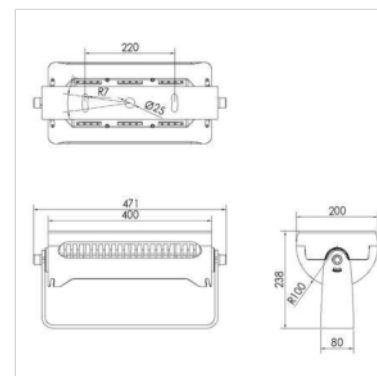

Related Products



Visor