

# LED Recessed Linear



## Application



This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

## Specification

<b>Housing</b>	Die-formed cold roll steel
<b>Finishing</b>	Powder coated in white
<b>Reflector</b>	Curve steel sheet in low glossy white
<b>Diffuser</b>	Extrude profile in frosted PMMA
<b>Mounting</b>	Recessed T-bar (for Concealed ceiling recommend to use additional frame)
<b>Power</b>	36W
<b>Light Source</b>	LED Strip Module
<b>Colour Temperature</b>	4000/6500K
<b>Luminaire Output</b>	4080/4080lm
<b>Control Gear</b>	Built-in driver
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0.9
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	50,000 hrs.
<b>Equivalent</b>	T5 2x28W/T8 2x36W

## Ordering Data

Model	Watt
RDIL/PMMA/1L-36LED	36W
RDIL/PMMA/2S-36LED	36W

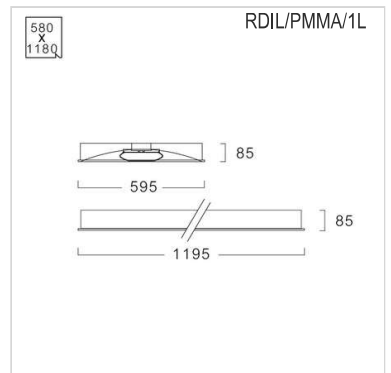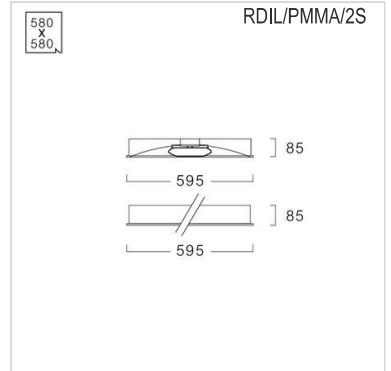

## Related Products



Concealed Ceiling Frame  
600x600mm.



Concealed Ceiling Frame  
600x1200mm.



LED Strip Module

