

TIS SLS3144

Application


Floodlight is designed to illuminate building facade, building security,indoor and outdoor stadiums, monuments,statues,exhibition halls,shopping centers,showrooms,display areas, residences,etc.

Specification

Housing	Die-cast aluminium housing
Front Cover	Tempered glass
Finishing	White/Black
Dimension	111x438x402mm.
Weight	7.5kg.
Power	100/150/200/240W
Colour Temperature	2700/3000/4000/5700K
CRI	>80
SDCM	3 Step
Luminaire Output	100W : 12000/12000/12000/12000lm 150W : 18000/18000/18000/18000lm 200W : 23000/23000/23000/23000lm 240W :26400/26400/26400/26400lm
Beam Angle	15/30/30x60 (P10) degree 65x120 (P10)/65x120 (P55) degree
Control Gear	Integral driver
Dimming Method	1-10V, DMX
Power Supply	220Vac
IP Rating	66
Luminaire Lifetime	50000hrs

Ordering Data

Model	Watt
SLS3144/BL-100W-3000K-15D	100W
SLS3144/BL-100W-3000K-30D	100W
SLS3144/BL-100W-3000K-30x60D(P10)	100W
SLS3144/BL-100W-3000K-65x120D(P10)	100W
SLS3144/BL-100W-3000K-65x120D(P55)	100W
SLS3144/BL-150W-3000K-15D	150W
SLS3144/BL-150W-3000K-30D	150W
SLS3144/BL-150W-3000K-30x60D(P10)	150W
SLS3144/BL-150W-3000K-65Dx120D(P10)	150W
SLS3144/BL-150W-3000K-65x120D(P55)	150W
SLS3144/BL-200W-3000K-15D	200W
SLS3144/BL-200W-3000K-30D	200W
SLS3144/BL-200W-3000K-30x60D(P10)	200W
SLS3144/BL-200W-3000K-65x120D(P10)	200W
SLS3144/BL-200W-3000K-65x120D(P55)	200W
SLS3144/BL-240W-3000K-15D	240W
SLS3144/BL-240W-3000K-30D	240W
SLS3144/BL-240W-3000K-30x60D(P10)	240W
SLS3144/BL-240W-3000K-65Dx120D(P10)	240W
SLS3144/BL-240W-3000K-65x120D(P55)	240W

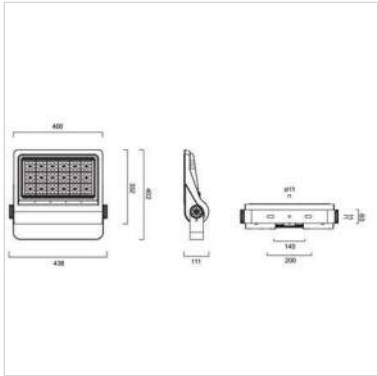

Related Products



Barn Door

Visor