

LED Recessed Linear



TIS RSTL300

Application




This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification

Housing	Die-formed cold roll steel
Finishing	Powder coated in white
Reflector	Mirror anodized aluminium
Louver	Mirror anodized aluminium with Christmas tree profiled cross vanes
Diffuser	Opal Acrylic
Mounting	Recessed T-bar (for Concealed ceiling recommend to use additional frame)
Power	20/40W
Light Source	LED Strip Module
Colour Temperature	4000/6500K
Luminaire Output	20W:2000/2000 lm 40W:4000/4000 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	40
Luminaire Lifetime	50,000 hrs.
Equivalent	20W:T5 2x14W/T8 2x18W 40W:T5 2x28W/T8 2x36W

Ordering Data

Model	Watt
RSTL300/2S-20LED	20W
RSTL300/2L-40LED	40W

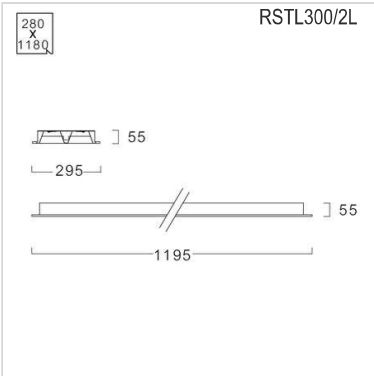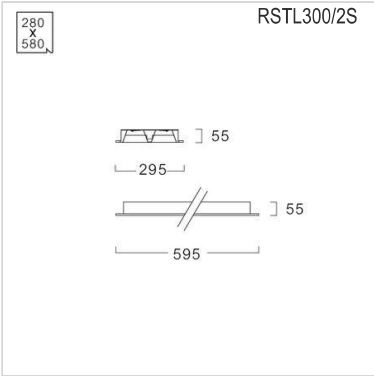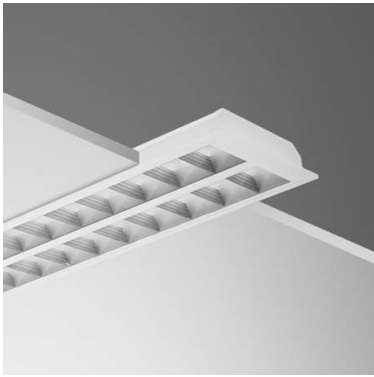

Related Products

