

LED Recessed Linear



TIS RSTPL600

Application



This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification

Housing	Die-formed cold roll steel
Finishing	Powder coated in white
Reflector	Mirror anodized aluminium
Diffuser	Opal Acrylic
Mounting	Recessed T-bar (for Concealed ceiling recommend to use additional frame)
Power	20/40W
Light Source	LED Strip Module
Colour Temperature	4000/6500K
Luminaire Output	20W:2000/2000 lm 40W:4000/4000 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	40
Luminaire Lifetime	50,000 hrs.
Equivalent	20W:T5 2x14W/T8 2x18W 40W:T5 2x28W/T8 2x36W

Ordering Data


Model	Watt
RSTPL600/2S-20LED	20W
RSTPL600/2L-40LED	40W

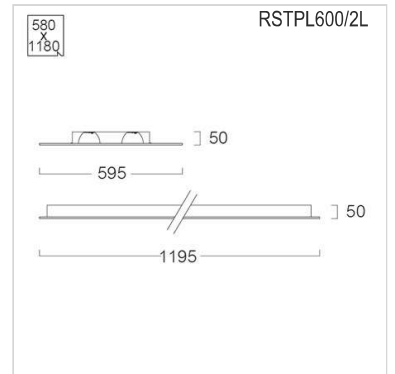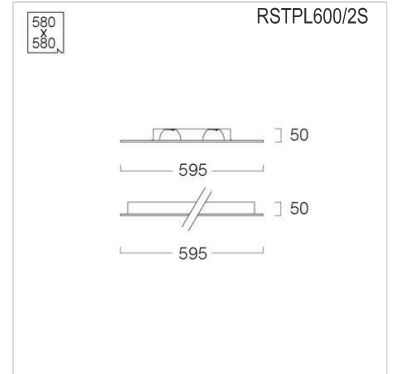

Related Products



Concealed Ceiling Frame
600x600mm.



Concealed Ceiling Frame
600x1200mm.



LED Strip Module

