

LED Linear High Bay







LSFH(WIRE GUARD)/CT

Specification

Housing	Die-formed cold roll steel
Description	Reflector type MI : Mirror anodized aluminium SMI : Super mirror anodized aluminium WR : White finish
Finishing	Powder coated in white
Louver	Wire Guard
Mounting	Surface
Power	1L : 23W (1 lamp) 2L : 46W (2 lamps) 3L : 69W (3 lamps) 4L : 92W (4 lamps)
Light Source	LED-T8
Lamp Holder	G13
Colour Temperature	3000/4000/6500K
Lamp Output	1L: L&E : 1x23W : 1x3700 lm 2L: L&E : 2x23W : 2x3700 lm 3L: L&E : 3x23W : 3x3700 lm 4L: L&E : 4x23W : 4x3700 lm
Luminaire Output	1L: L&E : 23W : 3269 lm 2L: L&E : 46W : 6538 lm 3L: L&E : 69W : 9807 lm 4L: L&E : 92W : 13076 lm
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
LED Lifetime	L&E : 50,000 hrs.
Equivalent	23W : T5 1x54W 46W : T5 2x54W 69W : T5 3x54W 92W : T5 4x54W

Ordering Data

Model	Watt
LSFH/1L-HBM/MI/T8(Wire Guard)/CT-XXLED-T8	23W
LSFH/1L-HBM/SMI/T8(Wire Guard)/CT-XXLED-T8	23W
LSFH/1L-HBM/WR/T8(Wire Guard)/CT-XXLED-T8	23W
LSFH/2L-HBM/MI/T8(Wire Guard)/CT-XXLED-T8	46W
LSFH/2L-HBM/SMI/T8(Wire Guard)/CT-XXLED-T8	46W
LSFH/2L-HBM/WR/T8(Wire Guard)/CT-XXLED-T8	46W
LSFH/3L-HBM/MI/T8(Wire Guard)/CT-XXLED-T8	69W
LSFH/3L-HBM/SMI/T8(Wire Guard)/CT-XXLED-T8	69W
LSFH/3L-HBM/WR/T8(Wire Guard)/CT-XXLED-T8	69W
LSFH/4L-HBM/MI/T8(Wire Guard)/CT-XXLED-T8	92W
LSFH/4L-HBM/SMI/T8(Wire Guard)/CT-XXLED-T8	92W
LSFH/4L-HBM/WR/T8(Wire Guard)/CT-XXLED-T8	92W

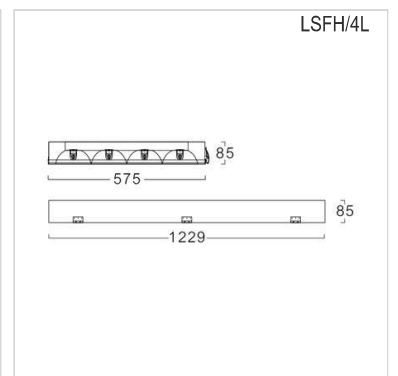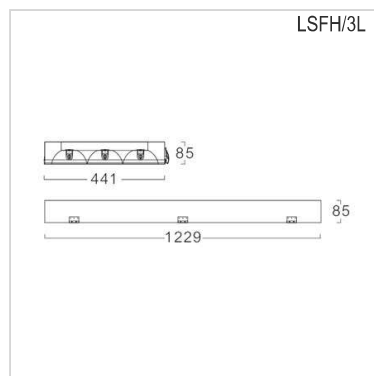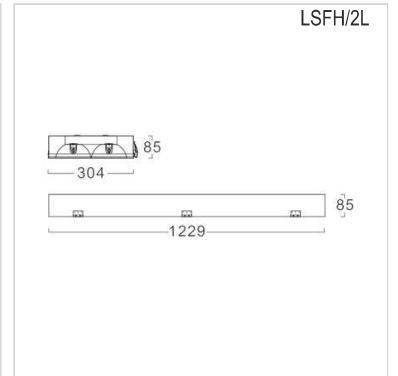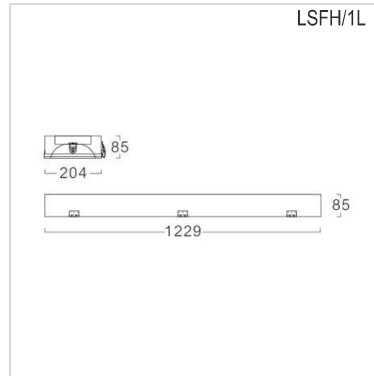

Related Products



LED-T8

