

LED Recessed Linear



TIS RMQL300

Application


This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification

Housing	Die-formed cold roll steel
Finishing	Powder coated in white
Reflector	Mirror anodized aluminium
Diffuser	Opal acrylic
Mounting	Recessed T-bar (for Concealed ceiling recommend to use additional frame)
Power	36W
Light Source	LED Strip Module
Colour Temperature	4000/6500K
Luminaire Output	4000/4000 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	40
Luminaire Lifetime	50,000 hrs.
Equivalent	T5:2x28W, T8:2x36W

Ordering Data

Model	Watt
RMQL300/1L-36LED	36W

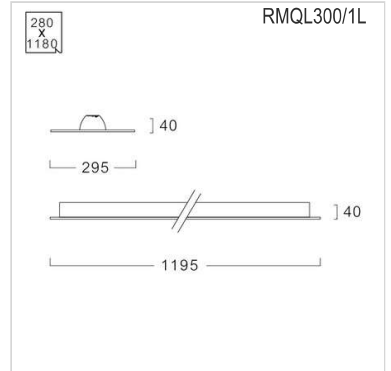

Related Products



Concealed Ceiling Frame
300x1200mm.



LED Strip Module

