

LED High Bay



 TIS HBL711

Application


Low-high bay is designed to use for shopping malls, supermarkets, discount stores, cloth shops, convenience stores, retail shops, garages, warehouses, storage areas, maintenance areas, production areas, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Polycarbonate
Gasket	Silicone rubber
Dimension	Dia.280x200 mm.
Mounting	Hook or chain suspension
Power	130W
Light Source	LED Module
Colour Temperature	5700K
Luminaire Output	20800 lm
Beam Angle	90 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	65
Luminaire Lifetime	50,000 hrs.
Equivalent	MH 250W

Ordering Data

Model	Watt
HBL711-130LED	130W

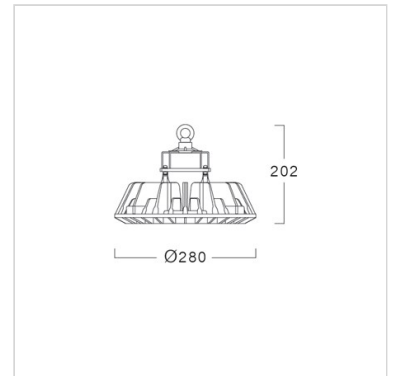

Related Products



Black aluminium reflector



Polycarbonate reflector



U-bracket

