

# LED Accent



 TIS **GSL131**

## Application


Accent Luminaire is designed for a wide variety of architectural and landscape applications to accent or highlight specific architectural and landscape features, etc.

## Specification


<b>Housing</b>	Die-cast aluminium
<b>Finishing</b>	Powder coated in black
<b>Lens</b>	Clear toughened glass
<b>Gasket</b>	Silicone rubber
<b>Dimension</b>	50x80x84 mm.
<b>Mounting</b>	Ground spike
<b>Power</b>	8W
<b>Light Source</b>	LED-COB
<b>Colour Temperature</b>	3000K
<b>Luminaire Output</b>	650 lm
<b>Beam Angle</b>	15/30/50 degree
<b>Control Gear</b>	Separate switching power supply
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Insulation Class</b>	III
<b>IP Rating</b>	66
<b>Luminaire Lifetime</b>	50,000 hrs.
<b>Equivalent</b>	PAR30 75W

## Ordering Data

Model	Watt
GSL131-8LED	8W

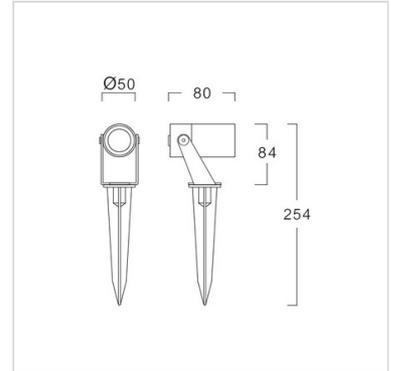

## Related Products



Honey comb



Tree strap

