

LED Wall Mount (Outdoor)




TIS WLL467

Application

Wall mount luminaire is designed to use for outdoor applications such as walkways, wall illumination, safety applications, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	181x43x114 mm.
Mounting	Surface
Power	/S : 5W /D : 12W
Light Source	LED-COB
Colour Temperature	3000K
Luminaire Output	440 lm
Beam Angle	Adjustable by sliding front cover
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Insulation Class	I
IP Rating	65
Luminaire Lifetime	30,000 hrs.
Equivalent	/S : CFL 11W /D : CFL 2x11W
Remarks	/S : Single side /D : Double side

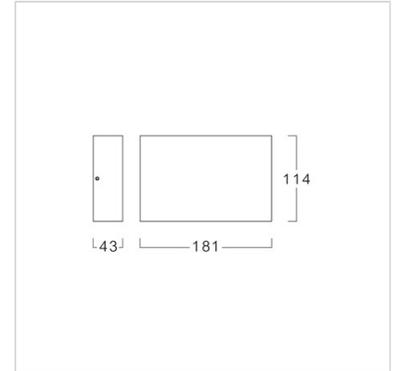

Ordering Data

Model	Watt
WLL467/S-5LED	5W
WLL467/D-12LED	12W

