

LED Recessed Linear



LRSTP300/CT

Application



This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification

Housing	Die-formed cold roll steel
Finishing	Powder coated in white
Reflector	Mirror anodized aluminium
Diffuser	Prismatic (Opal, Clear are available as option)
Mounting	Recessed
Power	2S:14-18W (2 lamps) 2L:28-32W (2 lamps)
Light Source	LED-T8
Lamp Holder	G13
Colour Temperature	3000/4000/6500K
Lamp Output	2S:L&E : 2x7/8/9W:2x1050 lm 2L:L&E : 2x14/16W:2x2100 lm
Luminaire Output	2S: 14/16/18W : 1360 lm 2L: 28/32W : 2720 lm
Power Supply	220-240VAC, 50Hz
Power Factor	>0,9
Insulation Class	I
IP Rating	40
LED Lifetime	L&E:25,000/50,000 hrs.
Equivalent	14-18W:T5 2x14W/T8 2x18W 28-32W:T5 2x28W/T8 2x36W

Ordering Data


Model	Watt
LRSTP300/2S/MI/PRF/CT-XXLED-T8	14-18W
LRSTP300/2L/MI/PRF/CT-XXLED-T8	28-32W

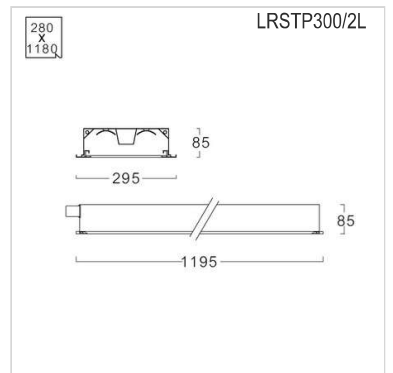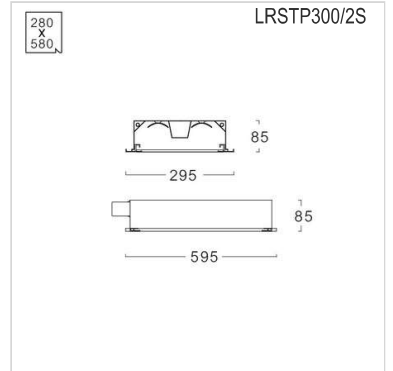

Related Products



LED-T8

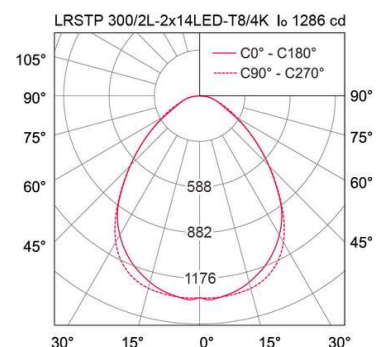


LRSTP 300




LIGHTING &
EQUIPMENT
PUBLIC COMPANY LIMITED

Installation Recessed Fluorescent Luminaires

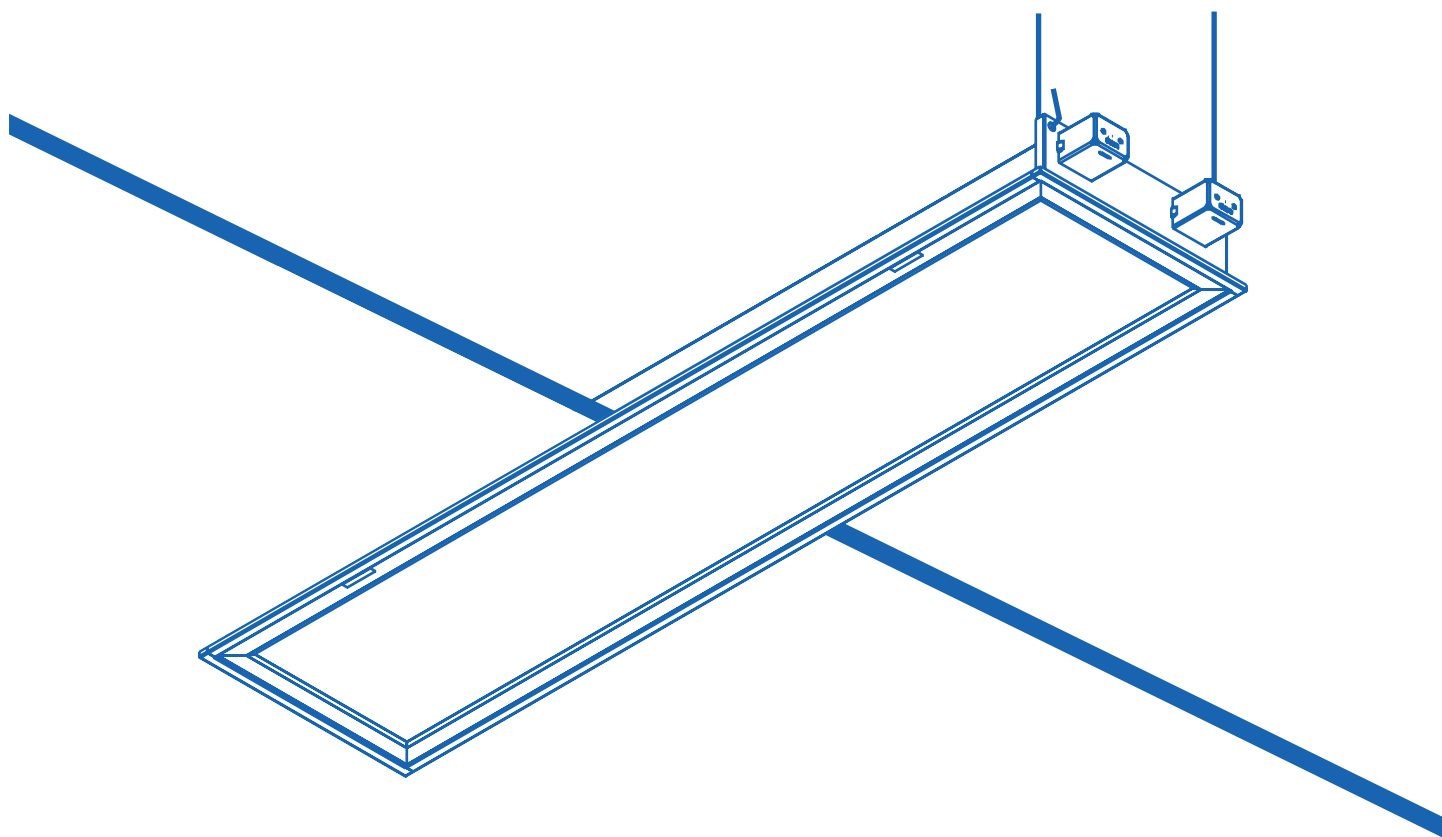

Recessed T-BAR

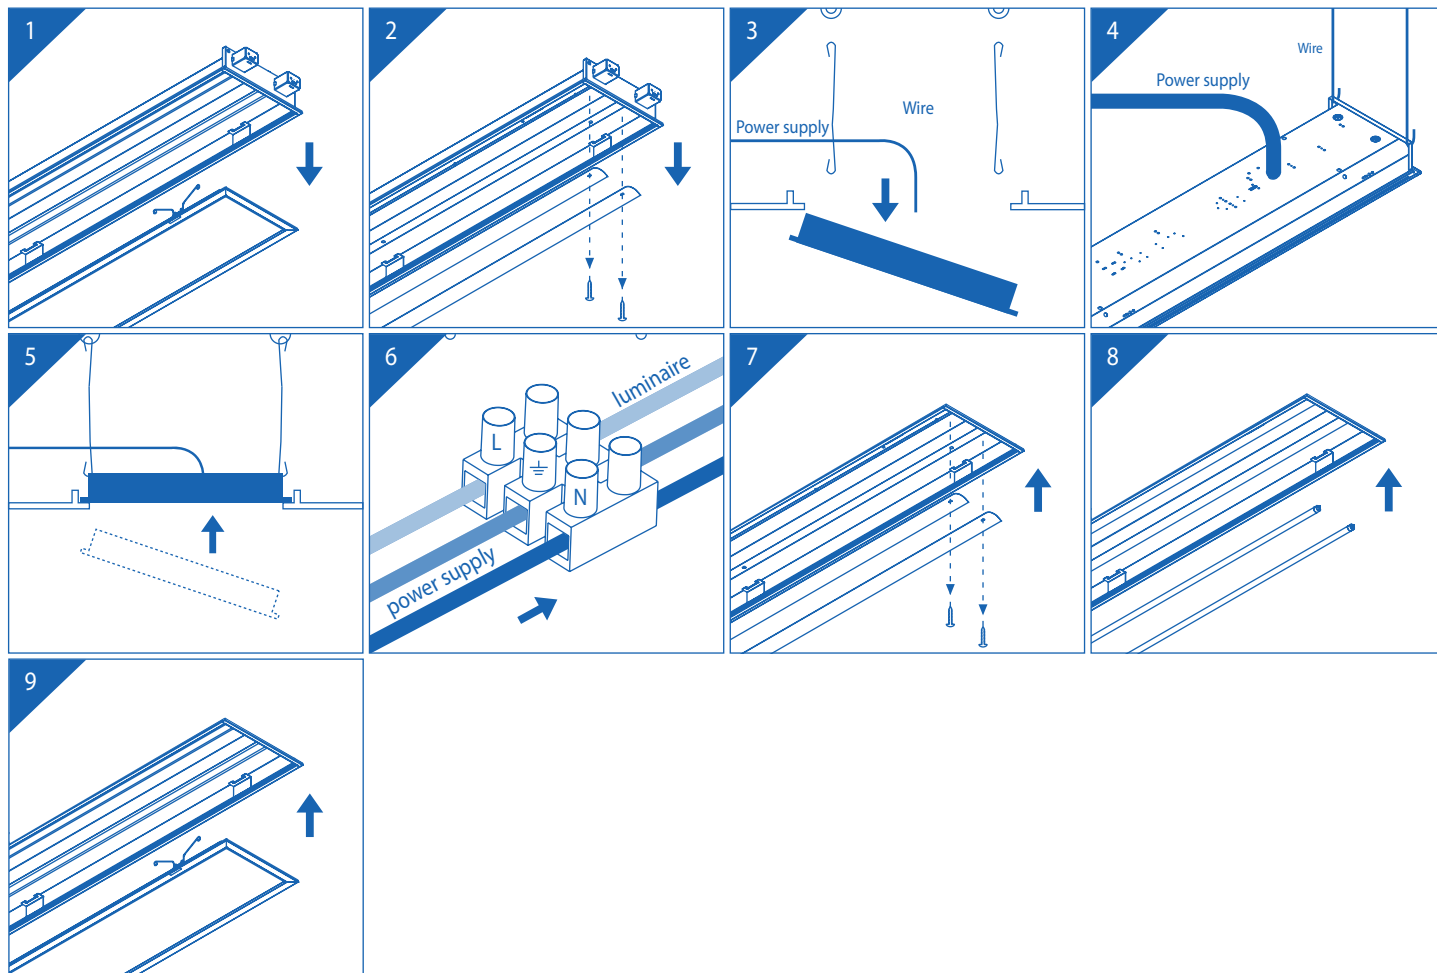


CAUTION ! Turn the electrical power off before installing luminaire.

LRSTP 300




**LIGHTING &
EQUIPMENT**
PUBLIC COMPANY LIMITED

Installation Recessed Fluorescent Luminaires

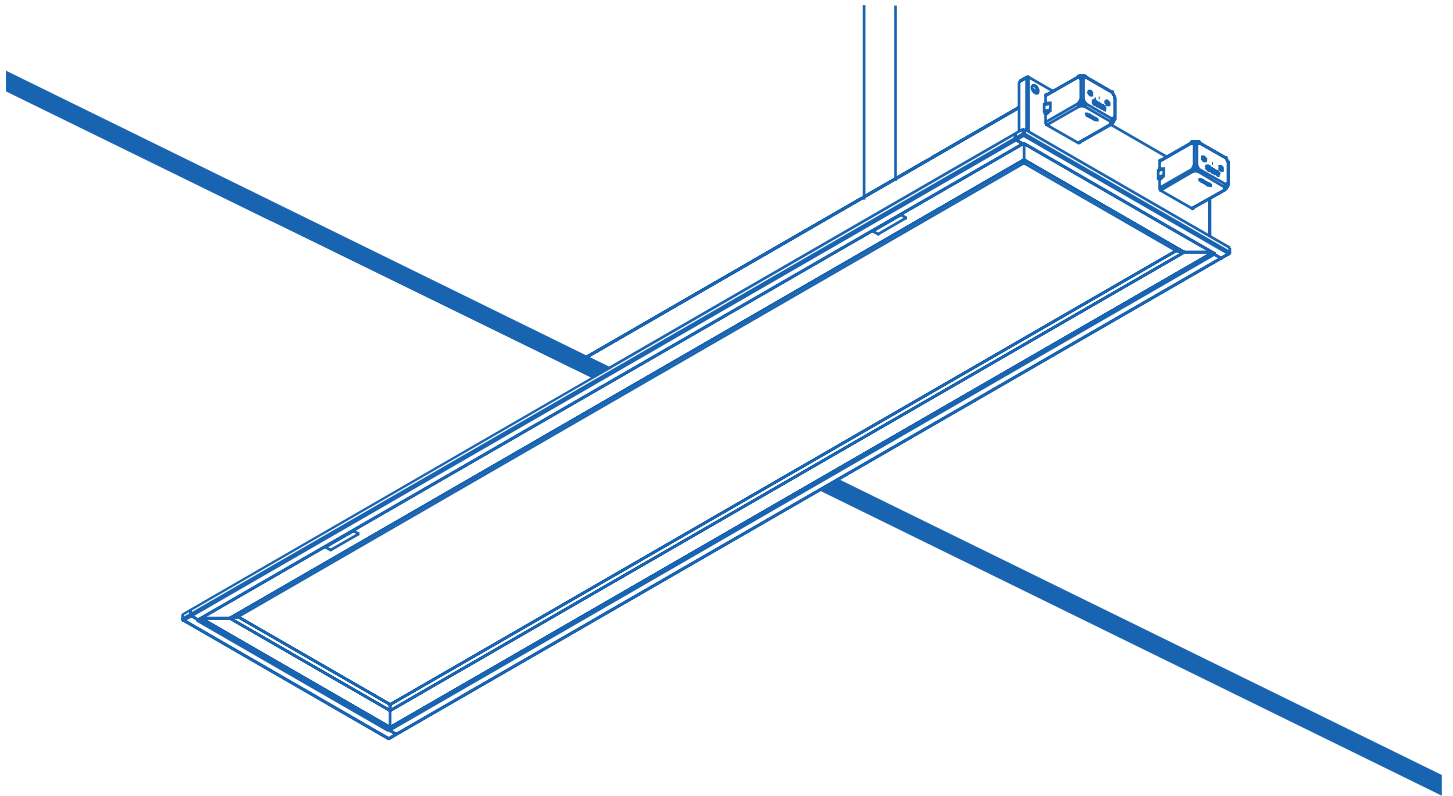

Concealed Ceiling

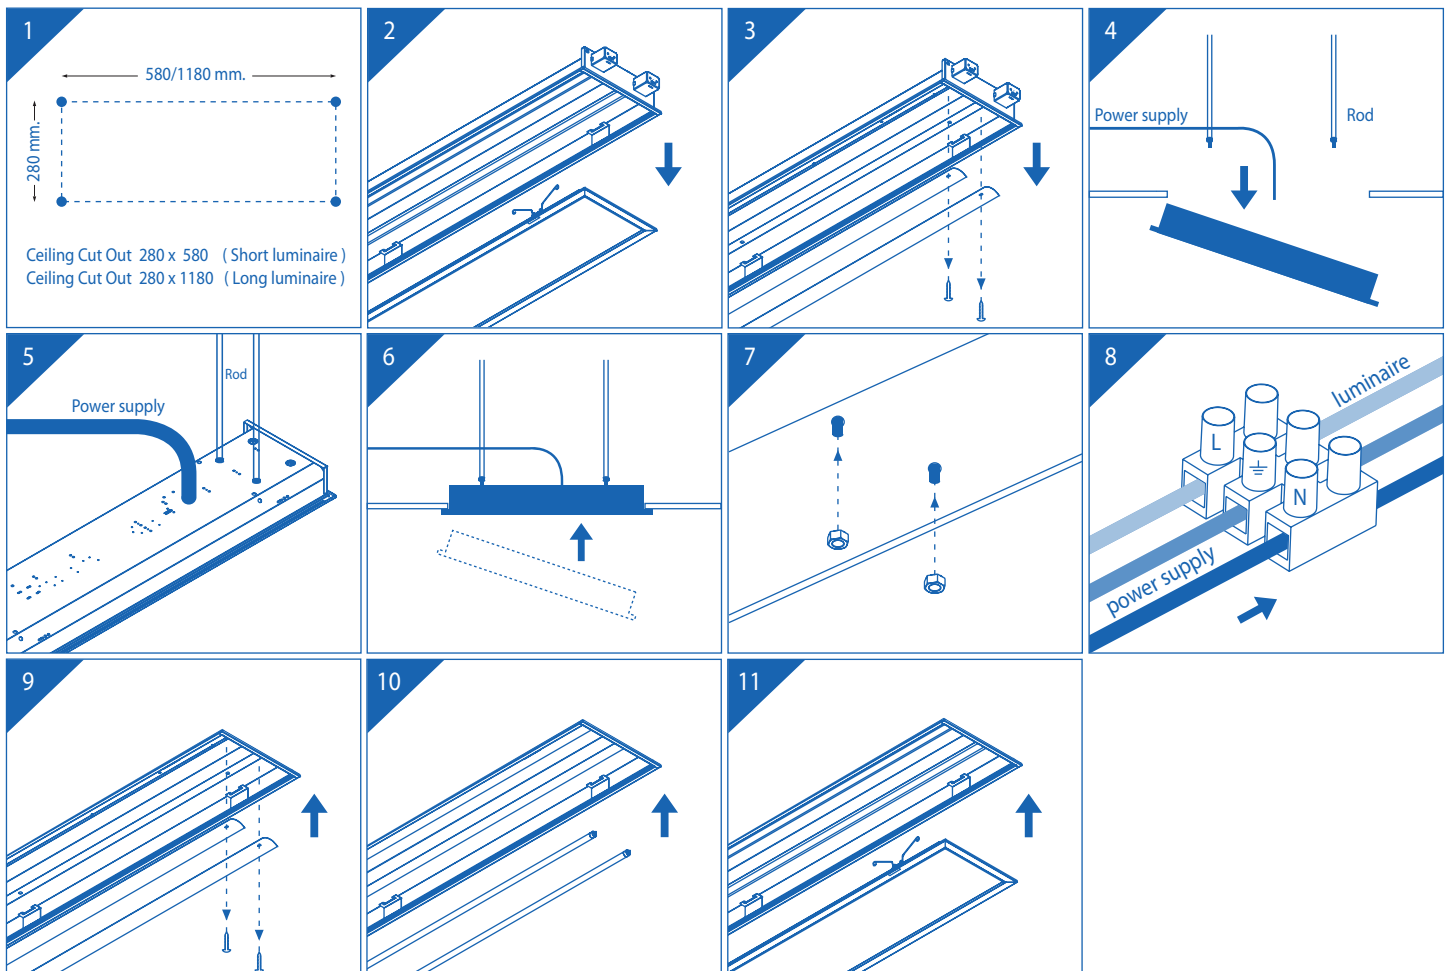

CAUTION ! Turn the electrical power off before installing luminaire.