

**Application**

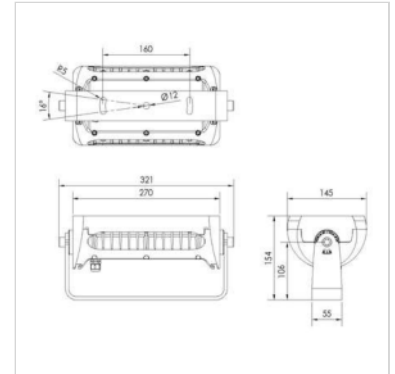
Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

**Specification**

<b>Housing</b>	Die-cast aluminium housing
<b>Front Cover</b>	Tempered glass
<b>Finishing</b>	White/Black
<b>Dimension</b>	145x321x154mm.
<b>Weight</b>	4,5kg.
<b>Power</b>	56W
<b>Colour Temperature</b>	2700/3000/4000/6000K
<b>CRI</b>	>80
<b>SDCM</b>	3 Step
<b>Luminaire Output</b>	4480/4480/4648/4760lm.
<b>Beam Angle</b>	3/6/12/30/40/60/10x70 degree
<b>Control Gear</b>	Integral driver
<b>Dimming Method</b>	DMX
<b>Power Supply</b>	220Vac
<b>IP Rating</b>	66
<b>Luminaire Lifetime</b>	50000hrs

**Ordering Data**

Model	Watt
FS011/WH-56W-3000K-10x70D	56W
FS011/WH-56W-3000K-12D	56W
FS011/WH-56W-3000K-30D	56W
FS011/WH-56W-3000K-3D	56W
FS011/WH-56W-3000K-40D	56W
FS011/WH-56W-3000K-60D	56W
FS011/WH-56W-3000K-6D	56W

**Related Products**

Visor