

TIS SLS041

Application


Floodlight is designed to illuminate building facade, building security,indoor and outdoor stadiums, monuments,statues,exhibition halls,shopping centers,showrooms,display areas, residences,etc.

Specification

Housing	Die-cast aluminium housing
Front Cover	Tempered glass
Finishing	Grey
Dimension	172x225x290mm.
Weight	4.3kg
Power	85W
Colour Temperature	2700/3000/4000/6500K
CRI	>80
SDCM	3 Step
Luminaire Output	5985/5985/6400/6400lm
Beam Angle	6/10/16/30/50/16x50
Control Gear	Integral driver
Dimming Method	DMX
Power Supply	220Vac
IP Rating	66
Luminaire Lifetime	50000hrs

Ordering Data

Model	Watt
SLS041/GY-85W-3000K-10D	85W
SLS041/GY-85W-3000K-16D	85W
SLS041/GY-85W-3000K-16x50D	85W
SLS041/GY-85W-3000K-30D	85W
SLS041/GY-85W-3000K-50D	85W
SLS041/GY-85W-3000K-6D	85W

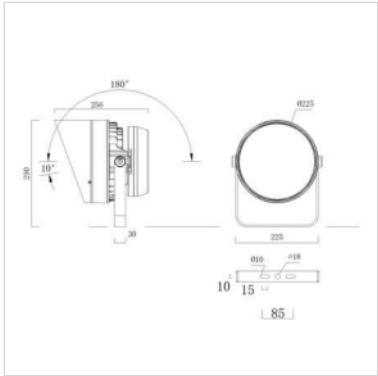

Related Products



Anti glare hood