

LED Batten



Application

This luminaire is designed to use for convenience stores, discount stores, modern trade stores, factories, schools, storage areas, hospitals, hotels, shopping centers, corridors, industrial areas, car parks, etc.

Specification


Housing	Extruded aluminium
Finishing	Anodized aluminium
Diffuser	Polycarbonate (PC)
Mounting	Surface
Power	10/20W
Light Source	LED Module
Colour Temperature	3000/4000/6500K
Luminaire Output	1S : 10W : 1050 lm 1L : 20W : 2170 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	40
Luminaire Lifetime	30,000 hrs.
Equivalent	10W : T5 1x14W/T8 1x18W 20W : T5 1x28W/T8 1x36W

Ordering Data

Model	Watt
LBCL/1S-10LED	10W
LBCL/1L-20LED	20W



LBCL/1S




LBCL/1L




Related Products




LED Strip Module

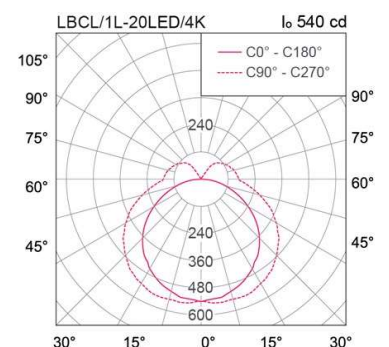


Installation Surface Fluorescent Luminaires

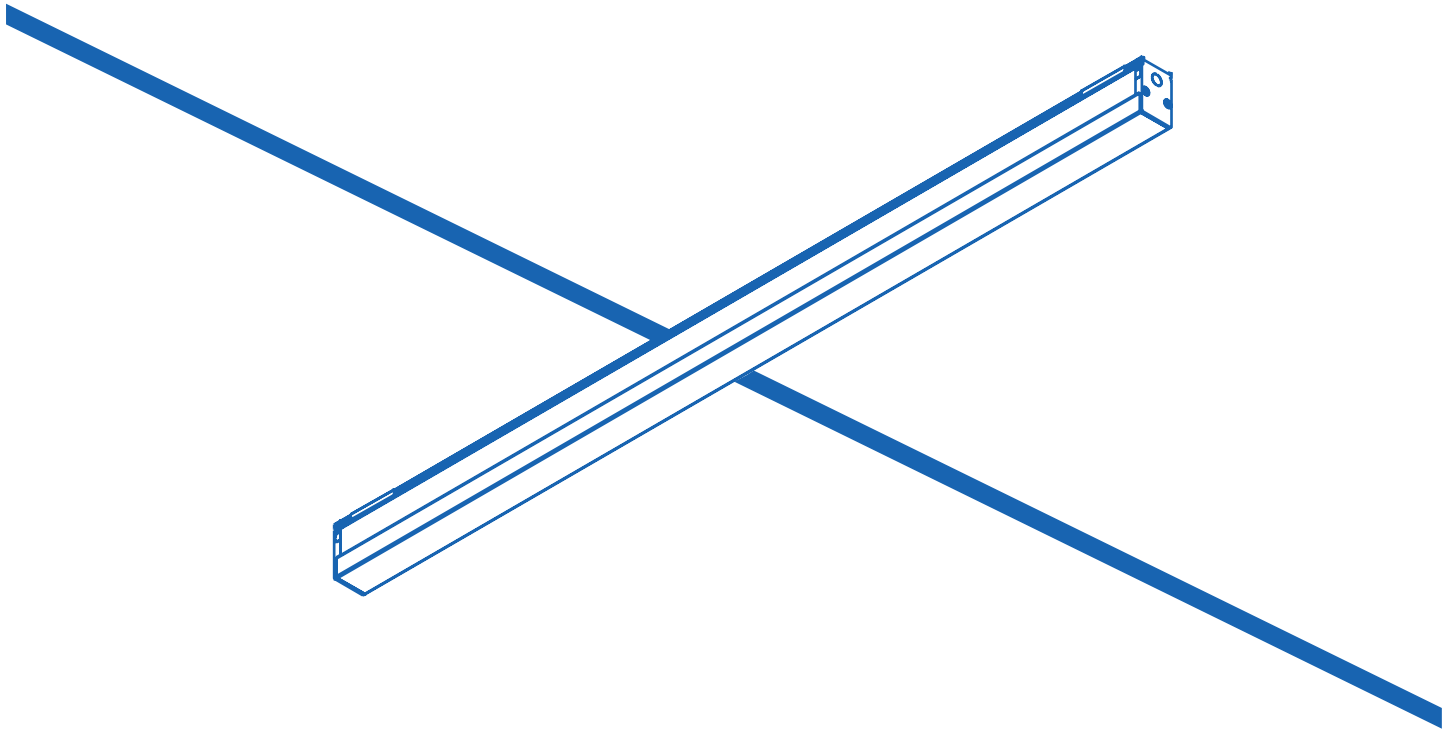

Surface Mounted

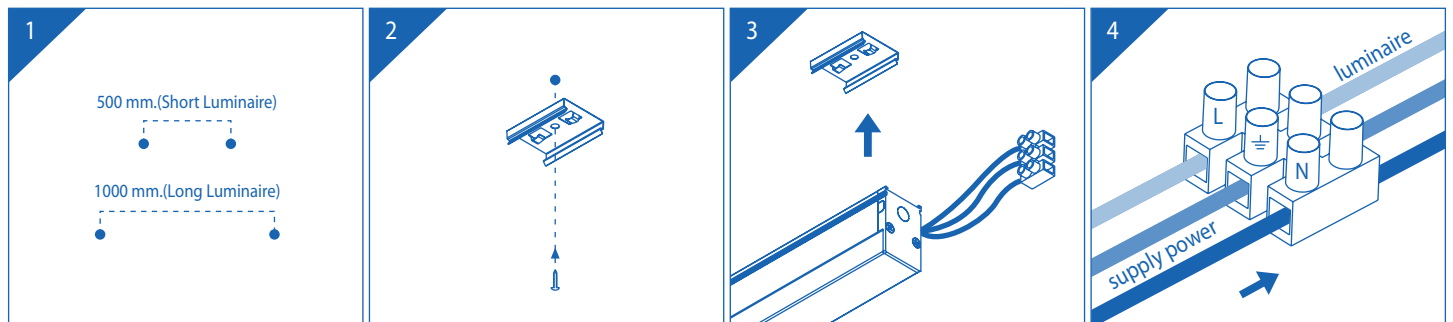

Installation Cove light Luminaires

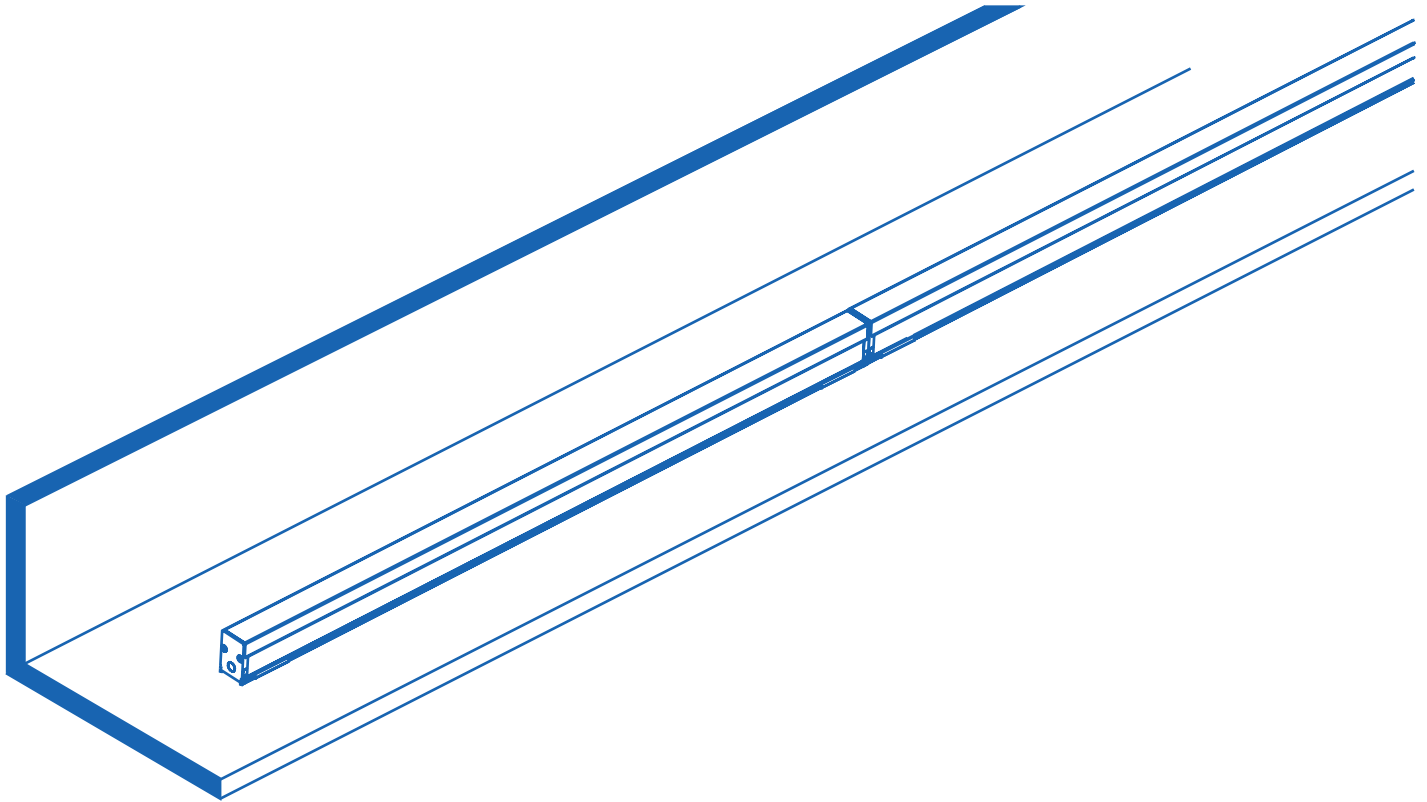

Surface Mounted

