

LED Spot / Tracklight



TIS TRL69

Application


Track light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, museums, recreational centers, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in white or black
Mounting	1 circuit lighting track (LTS01/LTR01)
Power	14/20/23W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	14W : 1540/1660/1805 lm 20W : 2200/2370/2575 lm 23W : 2635/2845/3090 lm
Beam Angle	15/24/36 Degree
Control Gear	Built-in driver
Power Supply	220VAC 50Hz
Power Factor	> 0.9
Insulation Class	II
IP Rating	20
LED Lifetime	40,000 hrs.
Equivalent	14W : PAR30 75W 20W : MH 20W 23W : MH 35W


Ordering Data

Model	Watt
TRL69/WH-14LED	14W
TRL69/WH-20LED	20W
TRL69/WH-23LED	23W

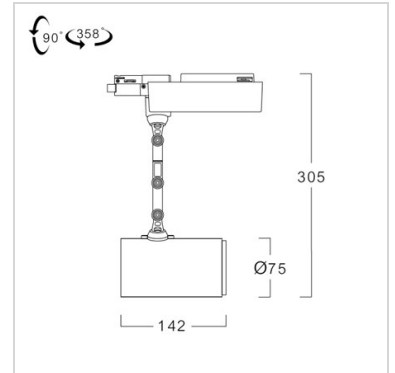


INSTALLATION GUIDE


STEP 1




STEP 2




STEP 3




STEP 4




STEP 5




STEP 6





Optional 1

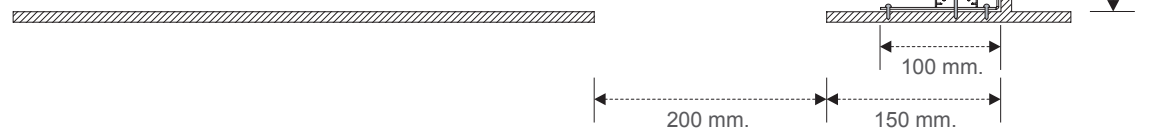

Optional 2

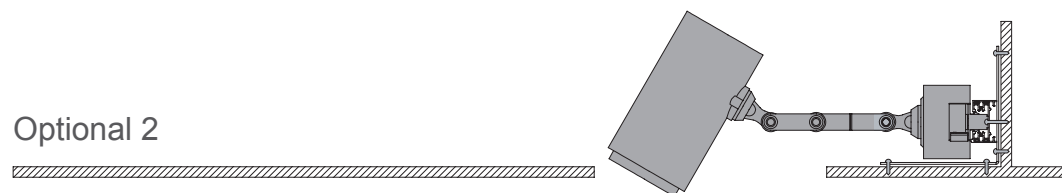

Optional 3

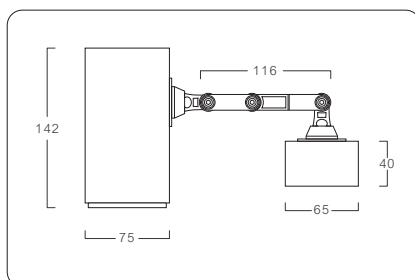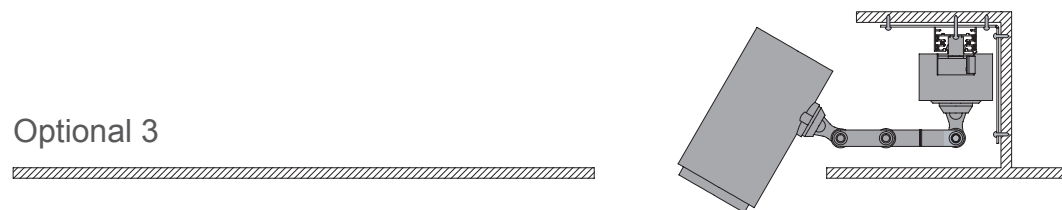

Operating condition

Electrical input system : 220VAC $\pm$ 10%, 50/60Hz

Ambient temperature : -25°C to 40°C

Ingress protection : IP20