

LED IP Recessed Downlight



 TIS RFM80

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

| | |
|---------------------------|--|
| Housing | Die-cast aluminium |
| Finishing | Powder Coated in white |
| Diffuser | Frosted glass |
| Mounting | Recessed |
| Power | 4-8W |
| Light Source | LED-MR16 |
| Lamp Holder | GX5.3 |
| Colour Temperature | 2700-6500K |
| Lamp Output | 6W : 2700/3000/4000/6500K : 550 lm 7W : 2700K : 550 lm 7W : 3000K : 600 lm |
| Control Gear | Separate magnetic or electronic transformer |
| Power Supply | 220VAC 50Hz |
| Power Factor | > 0.9 |
| Insulation Class | II |
| IP Rating | 44 |
| LED Lifetime | 6W : 15,000 hrs. 7W : 25,000 hrs. |
| Equivalent | MR16 35 - 50W |

Ordering Data

| Model | Watt |
|---------------------|------|
| RFM80/WH-XXLED-MR16 | 4-8W |

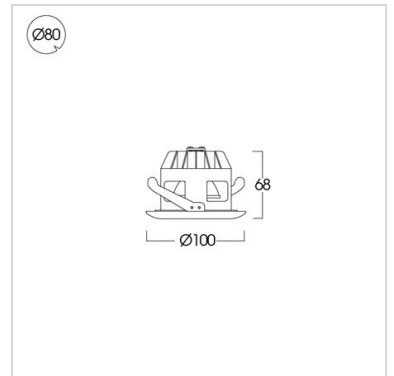

Related Products

