

LED Pendant



TIS PDL110

Application






Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in white or black
Mounting	suspension wires lenght 1,50 m.
Power	20/23/27W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80 *
Lamp Output	20W : 2200/2370/2575 lm 23W : 2635/2845/3090 lm 27W : 3065/3300/3515 lm
Luminaire Output	20W : 1805/1950/2112 lm * 23W : 2070/2236/2422 lm * 27W : 2320/2505/2668 lm *
Beam Angle	15/24/36/60 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0,9
Insulation Class	I
IP Rating	20
LED Lifetime	40,000 hrs.
Equivalent	20W : MH 20W 23W : MH 35W 27W : MH 70W
Remarks	* Value at 24 Degree

Ordering Data

Model	Watt
PDL110/WH-20LED	20W
PDL110/WH-23LED	23W
PDL110/WH-27LED	27W

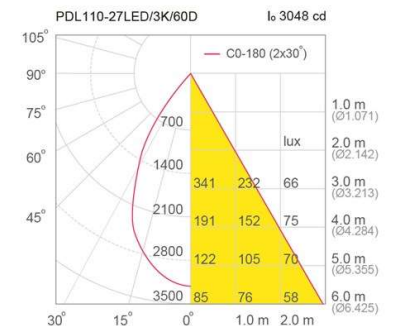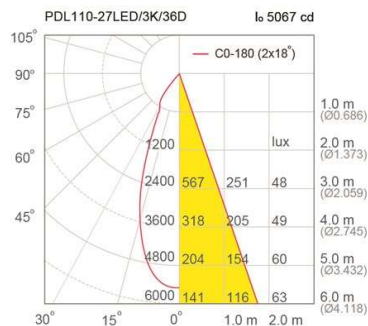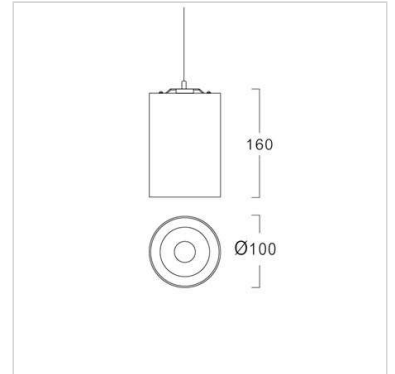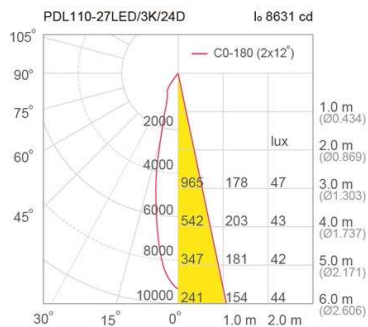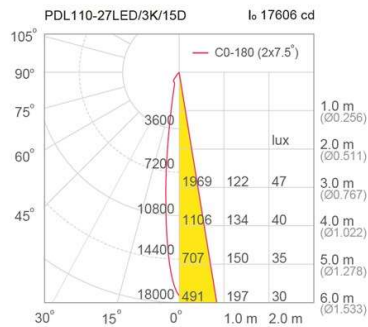

Related Products






20W




23W

27W




15D

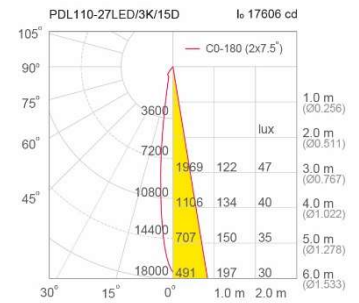

24D

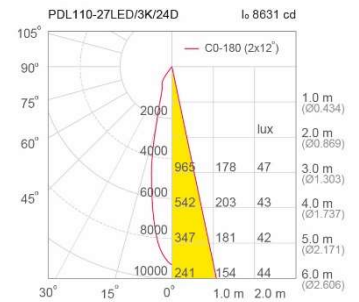

36D

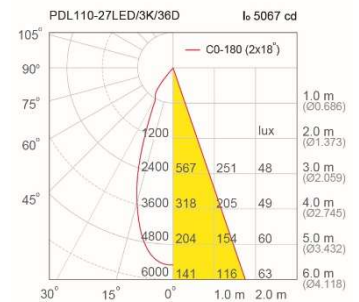

60D

