

LED IP Surface Downlight



ISDP90

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in white or black
Diffuser	Clear tempered glass
Dimension	Dia. 90x150 mm.
Mounting	Ceiling
Power	4-7W
Light Source	LED-PAR16
Lamp Holder	GU10
Colour Temperature	2700-6500K
Lamp Output	4.3W : 2700K : 380 lm 5.4W : 2700K : 402 lm 7W : 3000/4000K : 620 lm
Power Supply	220VAC, 50Hz (L&E lamps) 220-240VAC, 50Hz (other brands lamp are available as option)
Power Factor	N/A
Insulation Class	I
IP Rating	65
Luminaire Lifetime	15,000 -50,000hrs.
Equivalent	PAR16 35 - 50W
Remarks	Install on ceiling only

Ordering Data

Model	Watt
ISDP90/BK-GU10	4-7W
ISDP90/WH-GU10	4-7W

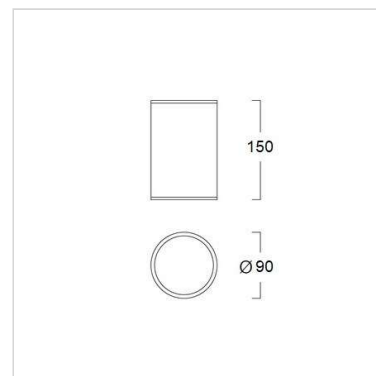

Related Products



ISDP90/BK

ISDP108-XXLED-E27

