

# LED Inground



## TIS INL212

### Application


Inground luminaire is designed to accent or highlight trees,walls,columns,signboards,etc.

### Specification


|                           |   |
|---------------------------|---|
| <b>Housing</b>            | Die-cast aluminium body with grade 316 stainless steel flange |
| <b>Finishing</b>          | Matt finished   |
| <b>Lens</b>               | Clear toughened glass   |
| <b>Gasket</b>             | Silicone rubber   |
| <b>Cable Entry</b>        | Nickel brass cable gland                                      |
| <b>Dimension</b>          | Dia.216x310 mm.   |
| <b>Cut Out</b>            | Dia.206 mm.   |
| <b>Mounting</b>           | Recessed in block out made of polypropylene                   |
| <b>Power</b>              | 17W   |
| <b>Light Source</b>       | LED-COB   |
| <b>Colour Temperature</b> | 3000/4000/6000K   |
| <b>Luminaire Output</b>   | 1275 lm   |
| <b>Beam Angle</b>         | 18/36 degree  |
| <b>Control Gear</b>       | Separate driver   |
| <b>Power Supply</b>       | 220-240VAC,50Hz   |
| <b>Insulation Class</b>   | III   |
| <b>IP Rating</b>          | 67  |
| <b>Luminaire Lifetime</b> | 50,000 hrs.   |
| <b>Equivalent</b>         | MH 35W  |

### Ordering Data

| Model        | Watt |
|--------------|------|
| INL212-17LED | 17W  |

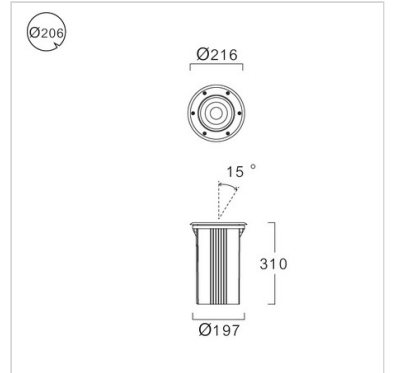

### Related Products



Honey comb

