

LED Recessed Downlight



TIS RAP49D

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Die-cast aluminium
Finishing	Powder Coated in white / black
Diffuser	Frosted glass
Mounting	Recessed
Power	3-4W
Light Source	LED-PAR11
Lamp Holder	GU10
Colour Temperature	2700/3000/4000K
Lamp Output	270-290 lm
Power Supply	220VAC,50Hz (L&E lamps) 220-240VAC,50Hz (other brands lamp are available as option)
Power Factor	N/A
Insulation Class	II
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	PAR16 35 - 50W

Ordering Data

Model	Watt
RAP49D/WH-XXLED-PAR11	3-4W
RAP49D/BK-XXLED-PAR11	3-4W

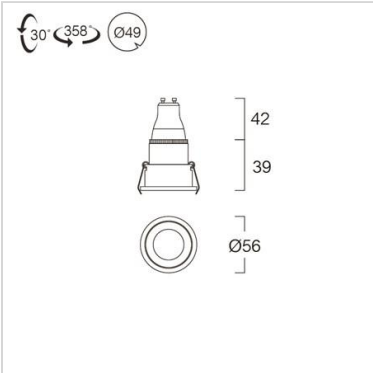

Related Products

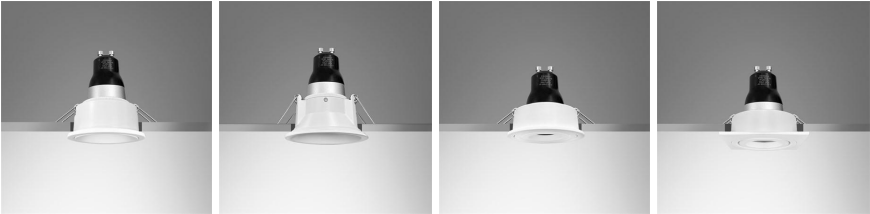

RFP49D-LED PAR11 RFP60D-LED PAR11 RAP58-LED PAR11 RSAP58-LED PAR11