

LED Recessed Linear



RDLL37

Application





Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Die-cast Aluminium
Finishing	Powder coated in white or black
Mounting	Recessed
Power	12W : 5 lamps 20W : 10 lamps 30W : 15 lamps
Light Source	LED Module
Colour Temperature	3000/4000/5000K
CRI	90
Luminaire Output	815 lm(30Degree) : 5 lamps 1470 lm(30Degree) : 10 lamps 1975 lm(30Degree) : 15 lamps
Beam Angle	15/30/45 Degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	30,000 hrs.

Ordering Data

Model	Watt
RDLL37-12LED/5P	12W
RDLL37-20LED/10P	20W
RDLL37-30LED/15P	30W

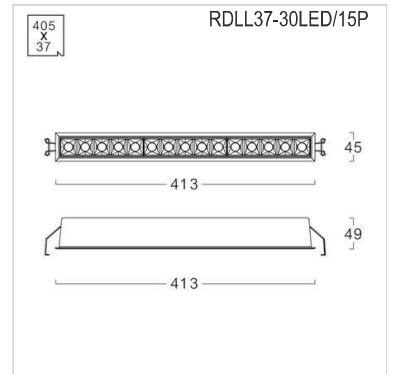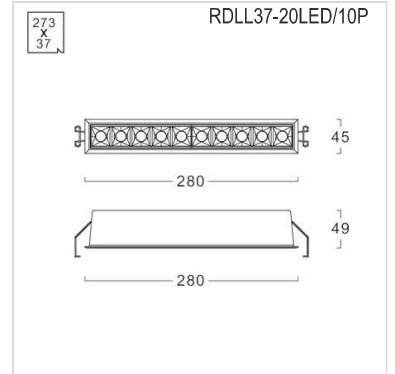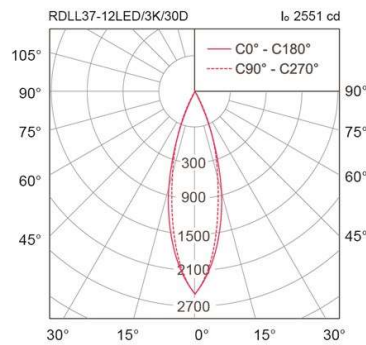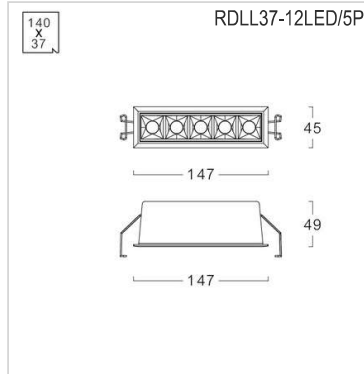

Related Products



LED Module

