

LED Recessed Downlight




ERDL100

Application

Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	High purity Aluminium die-formed
Finishing	Powder coated in white
Diffuser	Polycarbonate (PC)
Mounting	Recessed
Power	10/14W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	10W : 1120/1215/1290lm 14W : 1540/1660/1805lm
Luminaire Output	10W : 973/1051/1118 lm 14W : 1363/1472/1594 lm
Beam Angle	98 degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	10W : CFL 18W 14W : CFL 26W

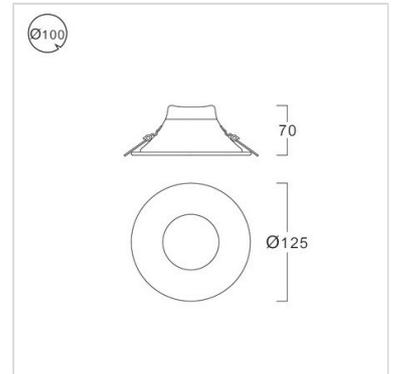

Ordering Data

Model	Watt
ERDL100/WH-10LED	10W
ERDL100/WH-14LED	14W

Related Products



ERDL150-14/20W

ERDL200-23/27W

