

**Application**

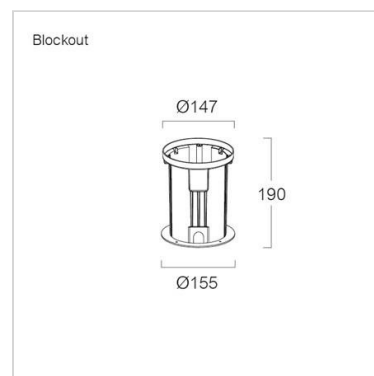
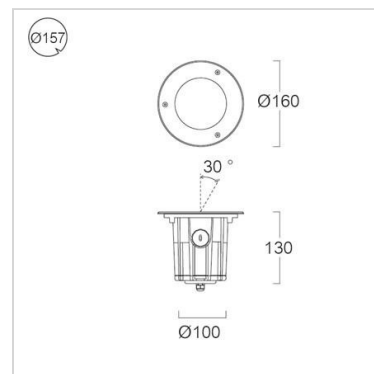

Inground luminaire is designed to accent or highlight trees, walls, columns, signboards, etc.

Specification

Housing	Die-cast aluminium body with grade 316 stainless steel flange
Structure	Tilt angle of LED-COB is adjustable by basic tooling without opening front cover
Finishing	Housing : Powder coated in black Flange : Matt finished
Lens	Clear toughened glass
Gasket	Silicone rubber
Cable Entry	Nickel brass cable gland
Power Cord	VCT 2x1.0 sq.mm., 3 meters
Dimension	Housing : Dia.160x130 mm. Blockout : Dia.155x190 mm. Dia.157 mm.
Cut Out	
Mounting	Recessed in blockout made of polypropylene
Power	12W
Light Source	LED-COB
Colour Temperature	3000/4000/5700K
Luminaire Output	1090 lm (22 degree) 1040 lm (40/60 degree)
Beam Angle	22/40/60 degree
Control Gear	Separate switching power supply
Power Supply	24VDC
Insulation Class	III
IP Rating	67
Luminaire Lifetime	50,000 hrs.
Equivalent	PAR30 100W

Ordering Data

Model	Watt
INL311-12LED	12W

**Related Products**

Honeycomb

