

LED IP Surface Downlight



 TIS ISDP145

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in white or black
Diffuser	Clear tempered glass
Mounting	Ceiling
Power	7-10W
Light Source	LED-PAR30 LED-BULB
Lamp Holder	E27
Colour Temperature	2700 - 6500K
Lamp Output	10W : 3000K : 1000 lm : LED-PAR30 9.5W : 3000/6500K : 800 lm : LED-BULB
Power Supply	220VAC 50Hz
Power Factor	> 0.9
Insulation Class	I
IP Rating	55
LED Lifetime	20,000-45,000 hrs.
Equivalent	PAR30 75W
Remarks	Install on ceiling only

Ordering Data

Model	Watt
ISDP145/WH-XXLED-E27	7-10W

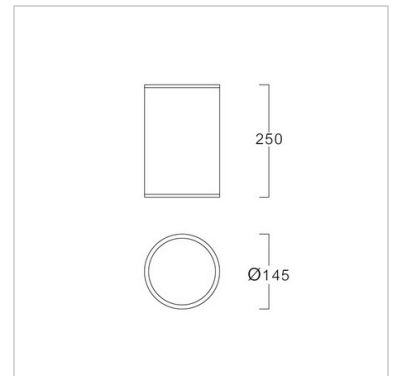

Related Products



ISDP90-XXLED-GU10

ISDP108-XXLED-E27

