

TIS IRDL170

Application



Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

| | |
|--------------------|--------------------------------|
| Housing | Die-cast aluminium |
| Finishing | Powder coated in white |
| Diffuser | Opal |
| Mounting | Recessed |
| Power | 23/30W |
| Light Source | LED-MODULE |
| Colour Temperature | 3000/4000/6500K |
| Luminaire Output | 23W : 2300 lm 30W : 3000 lm |
| Beam Angle | 85 Degree |
| Control Gear | Separate driver |
| Power Supply | 220-240VAC,50Hz |
| Power Factor | >0.90 |
| Insulation Class | I |
| IP Rating | 65 |
| Luminaire Lifetime | 40,000 hrs. |

Ordering Data

| Model | Watt |
|------------------|------|
| IRDL170/WH-23LED | 23W |
| IRDL170/WH-30LED | 30W |

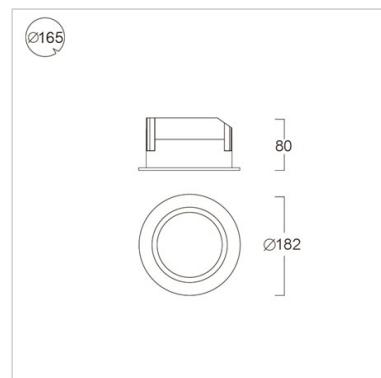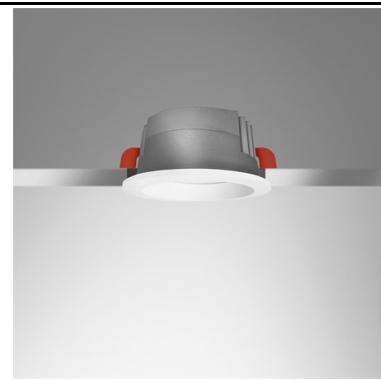

Related Products



IRDL100-10W

IRDL130-14/20W

IRDL210-40/49W

