

LED Multi-Recessed Downlight



TIS RSAQ150

Application



Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Painted steel frame and Die-cast aluminium lamp head
Finishing	Powder coated in white / black
Mounting	Recessed
Power	1 lamp : 10W / 2 lamps : 20W 1 lamp : 20W / 2 lamps : 40W
Light Source	LED-QR111
Lamp Holder	G53
Colour Temperature	15W : 2700/3000K 20W : 3000/4000K
Lamp Output	15W : 830/840 lm 20W : 1350/1400 lm
Beam Angle	15W : 24/40 degree 20W : 12/24/40 degree
Control Gear	Separate magnetic or electronic transformer
Power Supply	220VAC, 50Hz (Magnetic transformer) 220-240VAC, 50Hz (Electronic transformer is available as option)
Power Factor	>0.9
Insulation Class	II
IP Rating	20
Luminaire Lifetime	15W : 40,000 hrs. 20W : 25,000 hrs.
Equivalent	15W : AR111 75W 20W : AR111 100W

Ordering Data

Model	Watt
RSAQ150/BK-1xXXLED	15-20W
RSAQ150/BK-2xXXLED	30-40W

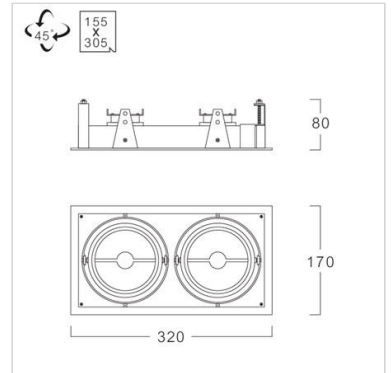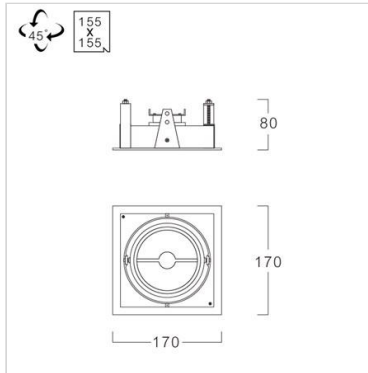

Related Products



Hood




Hood




RSAQ150D-1x-LED QR111



RSAQ150D-2xLED QR111



RAQ160-LED QR111



RAQ160D-LED QR111