

# LED Recessed Linear



## TIS RSTPL300

### Application



This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

### Specification

<b>Housing</b>	Die-formed cold roll steel
<b>Finishing</b>	Powder coated in white
<b>Reflector</b>	Mirror anodized aluminium
<b>Diffuser</b>	Opal Acrylic
<b>Mounting</b>	Recessed T-bar (for Concealed ceiling recommend to use additional frame)
<b>Power</b>	20/40W
<b>Light Source</b>	LED Strip Module
<b>Colour Temperature</b>	4000/6500K
<b>Luminaire Output</b>	20W:2000/2000 lm 40W:4000/4000 lm
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0.9
<b>Insulation Class</b>	I
<b>IP Rating</b>	40
<b>Luminaire Lifetime</b>	50,000 hrs.
<b>Equivalent</b>	20W:T5 2x14W/T8 2x18W 40W:T5 2x28W/T8 2x36W

### Ordering Data

Model	Watt
RSTPL300/2S-20LED	20W
RSTPL300/2L-40LED	40W

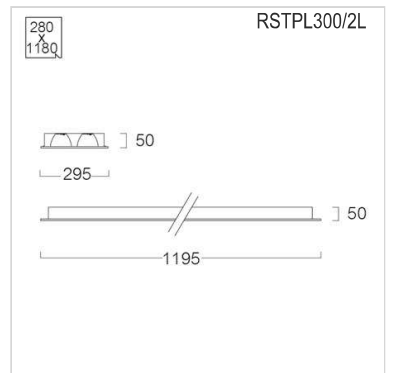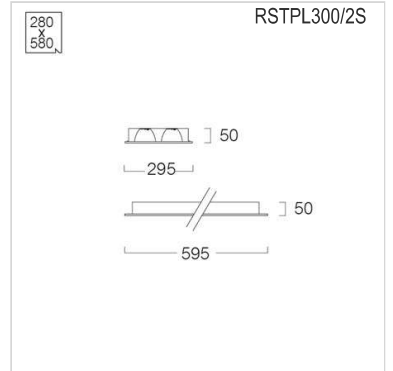

### Related Products



Concealed Ceiling Frame  
300x600mm.



Concealed Ceiling Frame  
300x1200mm.



LED Strip Module

