



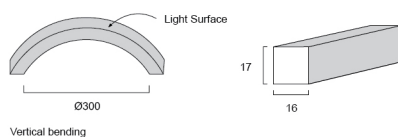


Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	68
CRI	≥ 80
Min.Cutting Unit	Monochrome : 55.6mm Dynamic White : 83.3mm
Max. Continuous Length	15m
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver) Dynamic White : DMX (Via Remote Driver)
Weight (kg)	0.5 kg/m




SLN265-VB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (1050lm/m)	180°	24Vdc
	3000K (1100lm/m)		
	3500K (1100lm/m)		
	4000K (1100lm/m)		
	5700K (1100lm/m)		
	Dynamic white		
	2200K-5700K (750lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side




B = Button



End Cap


Aluminium Profile



Aluminium Profile




Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	68
CRI	≥ 80
Min.Cutting Unit	RGB : 83.3mm RGBW : 83.3mm
Max. Continuous Length	RGB : 10m RGBW : 8m
Control Options	DMX (Via Remote Driver)
Weight (kg)	0.5 kg/m

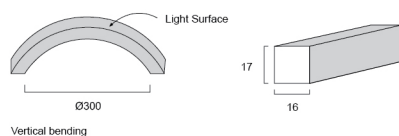


SLN265-VB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (545lm/m)	180°	24Vdc
15W/m	RGBW (860lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side




B = Button



End Cap

Aluminium Profile




Aluminium Profile




Aluminium Profile


Self-clinching Profile

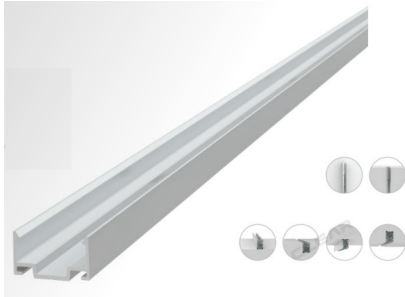


Dimension



Bendable self-clinching Profile

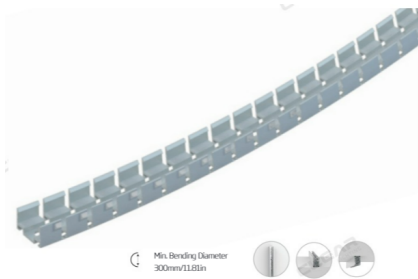

Dimension



Min Bending Diameter
300mm/11.81in