

LED Surface Downlight



TIS **SDL169**

Application



Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-formed aluminium
Finishing	Powder coated in white or black
Mounting	Surface
Power	30/35/40W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	30W : 3500/3770/4015 lm 35W : 3940/4245/4520 lm 40W : 4665/4995/5270 lm
Luminaire Output	30W : 3004/3244/3515 lm 35W : 3230/3488/3779 lm 40W : 3662/3955/4285 lm
Beam Angle	75 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	30W : MH 70W 35W : MH 100W 40W : MH 100W

Ordering Data

Model	Watt
SDL169/WH-30LED	30W
SDL169/WH-35LED	35W
SDL169/WH-40LED	40W

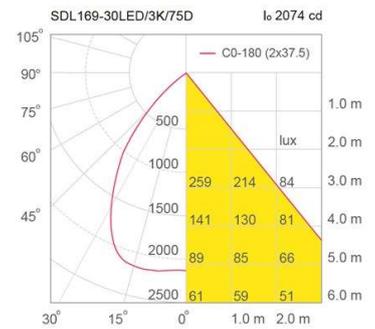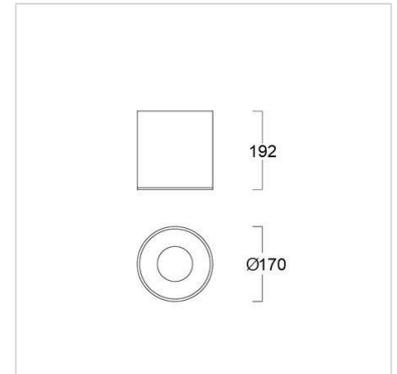

Related Products

