

LED Recessed Downlight



TIS RFM83

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Die-cast aluminium
Description	4 different color matching are available for various applications WH : lamp head white , trim white BK : lamp head black , trim black WH/BK : lamp head white , trim black BK/WH : lamp head black , trim white Powder Coated in white / black
Finishing	Recessed
Mounting	1x4-8W (1 lamp) 2x4-8W (2 lamps)
Power	LED-MR16 GU5.3
Light Source	2700/3000/4000/6500K
Lamp Holder	>80
Colour Temperature	6W : 2700/3000/4000/6500K : 550 lm 6.5W : 2700/3000/4000K : 550 lm
CRI	Separate electronic transformer
Lamp Output	220-240VAC, 50Hz >0.5
Control Gear	II
Power Supply	20
Power Factor	6W : 15,000 hrs. 6.5W : 50,000 hrs.
Insulation Class	
IP Rating	
Lamp Lifetime	

Ordering Data

Model	Watt
RFM83/BK/WH-1xXXLED-MR16	4-8W
RFM83/BK-1xXXLED-MR16	4-8W
RFM83/WH/BK-1xXXLED-MR16	4-8W
RFM83/WH-1xXXLED-MR16	4-8W
RFM83/BK/WH-2xXXLED-MR16	8-16W
RFM83/BK-2xXXLED-MR16	8-16W
RFM83/WH/BK-2xXXLED-MR16	8-16W
RFM83/WH-2xXXLED-MR16	8-16W

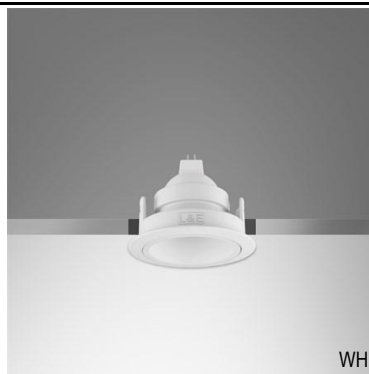

WH





WH




BK




BK

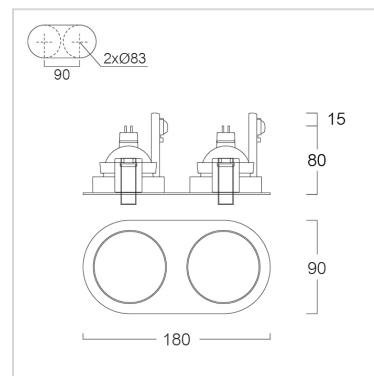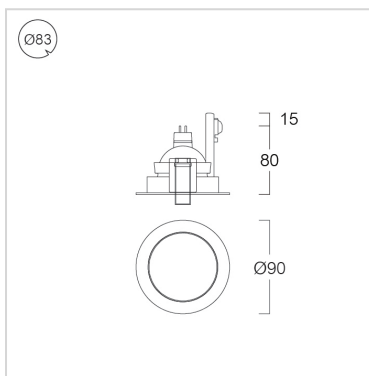

Accessories



Honey comb



Filter



Anti glare

