

LED Surface Downlight



TIS SSFP75

Application



Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-cast aluminium
Description	4 different lamp heads are available for various applications WR (front reflector white) BR (front reflector black) MI (front reflector chrome) MB (front reflector black chrome)
Finishing	Powder Coated in white/black
Mounting	Surface
Power	4-7W
Light Source	LED-PAR16
Lamp Holder	GU10
Colour Temperature	2700 - 4000K
Lamp Output	4.3W : 2700K : 380 lm 5.4W : 2700K : 402 lm 7W : 3000/4000K : 620 lm
Power Supply	220VAC, 50Hz (L&E lamps) 220-240VAC, 50Hz (other brand lamps are available as option)
Insulation Class	II
IP Rating	20
Luminaire Lifetime	15,000-50,000 hrs.
Equivalent	PAR16 35 - 50W

Ordering Data

Model	Watt
SSFP75/BR/WH-XXLED	4-7W
SSFP75/MB/WH-XXLED	4-7W
SSFP75/MI/WH-XXLED	4-7W
SSFP75/WR/WH-XXLED	4-7W

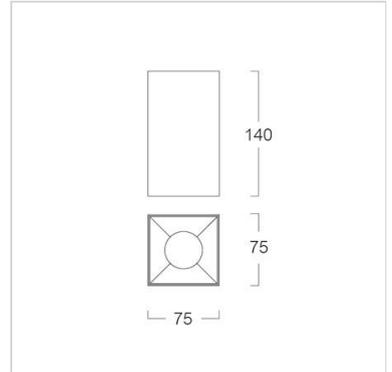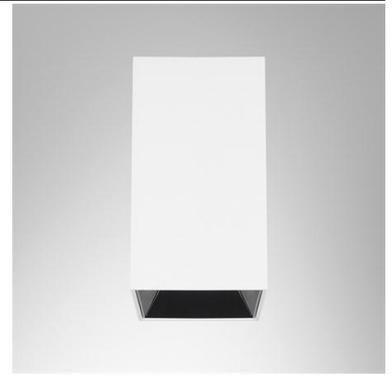

Related Products

