



LMS ZigBee Gateway(BE)



- Wireless smart lighting control by L&E Software
“**Lighting Management System, LMS**”
- ZigBee 3.0 Protocol, Low power consumption
- Big External antenna extended maximum operating range to 100m
- LAN connection required
- Maximum connected node 100 devices
(Including max.30 Motion or Occupancy sensors,
5 Daylight or CCT sensors)


Specification

Model	SGWBE-BS-ZBGP-AL-LAN-IA
Power Input	5Vdc, 500mA
Power Input Interface	Micro-USB, Type-C
Standby Power	1.0W
Ethernet Interface	RJ45
Supported Ethernet Protocol	IPV4, TCP, UDP
Encryption	AES 128
IP Rating	IP20
Cover	Milky/Polycarbonate
Material Color	Signal white (RAL9003)
Ambient Temperature	-20 ~ 55°C
Relative Humidity	0 ~ 80%, Non-condensing
Dimension	127.5mmx80mmx38mm Ø17mmx150m(Antenna)
Weight	195g



LMS ZigBee Gateway(BE)

Dimensions

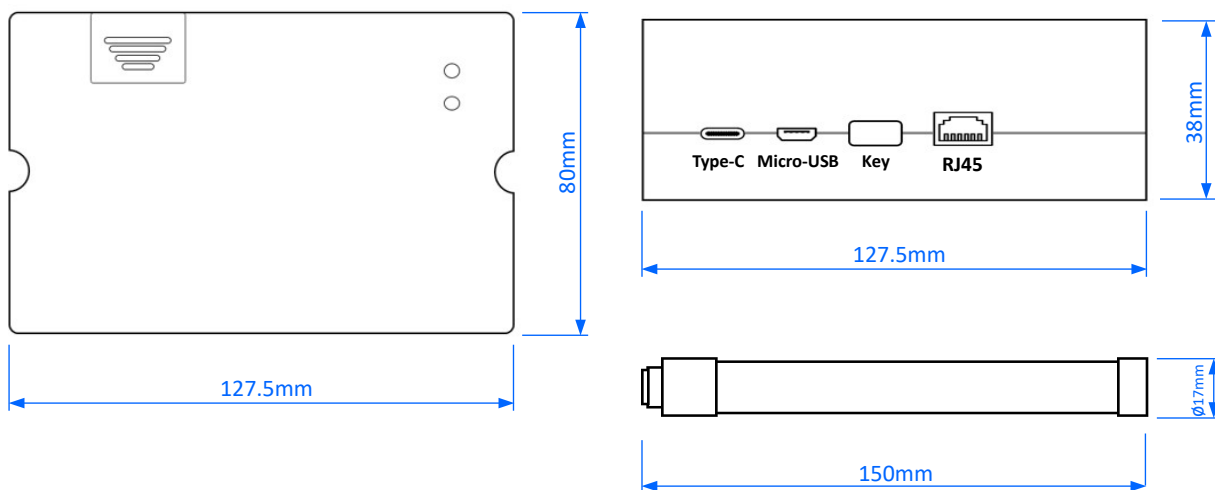

Wiring Diagram

