

TIS IRDL130

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Die-cast aluminium
Finishing	Powder coated in white
Diffuser	Opal
Mounting	Recessed
Power	14/20W
Light Source	LED-MODULE
Colour Temperature	3000/4000/6500K
Luminaire Output	14W : 1400 lm 20W : 2000 lm
Beam Angle	85 Degree
Control Gear	Separate driver
Power Supply	220-240VAC,50Hz
Power Factor	>0.90
Insulation Class	I
IP Rating	65
Luminaire Lifetime	40,000 hrs.

Ordering Data

Model	Watt
IRDL130/WH-14LED	14W
IRDL130/WH-20LED	20W

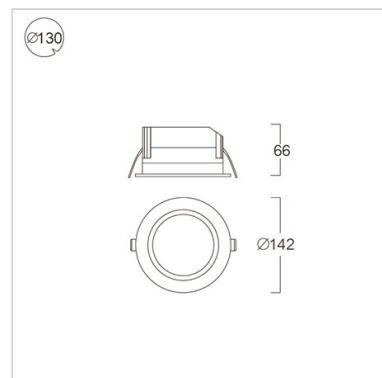

Related Products

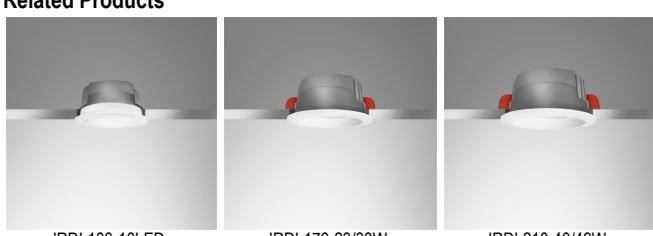

IRDL100-10LED

IRDL170-23/30W

IRDL210-40/49W

