



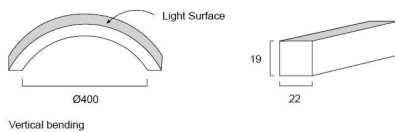


Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	68
CRI	≥ 80
Min.Cutting Unit	Monochrome : 50mm Dynamic White : 83.3mm
Max. Continuous Length	Monochrome : 15m (12W/m) Monochrome : 10m (16.5W/m)
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver) Dynamic White : DMX
Weight (kg)	0.5 kg/m




SLN266-VB


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (920lm/m)	120°	24 Vdc
	3000K (920lm/m)		
	3500K (950lm/m)		
	4000K (950lm/m)		
	5700K (950lm/m)		
	Dynamic white		
	2200K-5700K (610lm/m)		
16.5W/m	2700K (1300lm/m)		
	3000K (1300lm/m)		
	3500K (1400lm/m)		
	4000K (1400lm/m)		
	5700K (1400lm/m)		

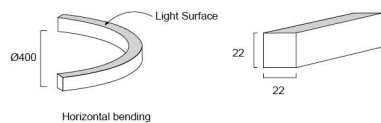**SLN266-HB**


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (720lm/m)	120°	24 Vdc
	3000K (720lm/m)		
	3500K (750lm/m)		
	4000K (750lm/m)		
	5700K (750lm/m)		
	Dynamic white		
	2200K-5700K (550lm/m)		
16.5W/m	2700K (1000lm/m)		
	3000K (1000lm/m)		
	3500K (1100lm/m)		
	4000K (1100lm/m)		
	5700K (1100lm/m)		

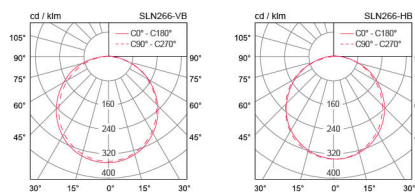**Accessories**


Injection-Moulded connector (E/S/B) + End cap




E = END





S = Side



B = Button



End Cap

Aluminium ProfileSerrated
Aluminium ProfileRecess Serrated
Aluminium ProfileHorizontal Bendable
Serrated Aluminium Profile
for SLN266-HBSerrated Aluminium Profile
200mm for SLN266-VB