

LED Recessed Downlight



TIS RAL135J

Application

Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.


Specification

Housing	Die-cast Aluminum
Description	Primary reflector : Vacuum aluminum plating PC. 4 different secondary reflectors are available for various applications MI (front reflector mirror chrome) WR (front reflector white) BR (front reflector black) MB (front reflector mirror black)
Finishing	Powder coated in white
Mounting	Recessed
Power	18/23/30/35/40W
Light Source	LED COB
Colour Temperature	3000K/4000K/5000K
CRI	>90/ >90/ >80
LED Output	18W : 2062/2226/2418 lm 23W : 2635/2845/3090 lm 30W : 3500/3770/4015 lm 35W : 3940/4245/4520 lm 40W : 4502/4581/5165 lm
Luminaire Output	18W : 1504/1609/1721 lm * 23W : 2014/2154/2305 lm ** 30W : 2745/2937/3142 lm ** 35W : 3055/3268/3497 lm ** 40W : 3342/3575/3826 lm **
Beam Angle	18W : 10 Degree 23/30/35/40W : 18/26/38/50/65 Degree
UGR	<19
Control Gear	Separate Driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs
Remarks	* Value at 10 Degree ** Value at 38 Degree



Ordering Data

Model	Watt
RAL135J/MI/WH-18LED	18W
RAL135J/MI/WH-23LED	23W
RAL135J/MI/WH-30LED	30W
RAL135J/MI/WH-35LED	35W
RAL135J/MI/WH-40LED	40W

Related Products



Honey comb

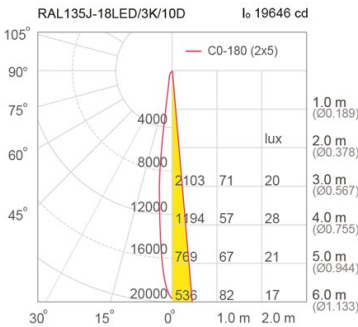
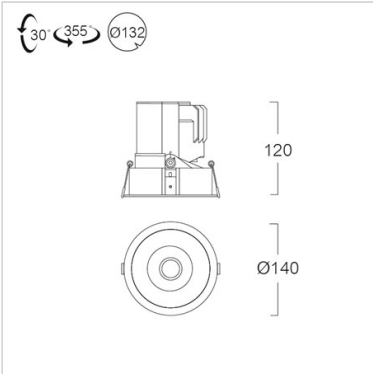


RAL135J



23W

30W



18D





26D





38D



50D



65D





RAL135J



35W

40W



18D





26D



38D



50D



65D

