

LED Pendant



TIS PAL135J

Application


Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing	Die-cast and extruded aluminium
Description	Upper reflector : Vacuum aluminum plating PC 4 different lamp heads are available for various applications WR (front reflector white) BR (front reflector black) MB (front reflector mirror black) MI (front reflector mirror chrome)
Finishing	Powder coated in white or black
Mounting	suspension wires length 1,50 m.
Power	18/23/30/35W
Light Source	LED COB
Colour Temperature	3000K/4000K/5000K
CRI	>90/ >90/ >80
Lamp Output	18W : 2062/2226/2418 lm 23W : 2635/2845/3090 lm 30W : 3500/3770/4015 lm 35W : 3940/4245/4520 lm
Luminaire Output	18W : 1504/1609/1721 lm * 23W : 2014/2154/2305 lm ** 30W : 2745/2937/3142 lm ** 35W : 3055/3268/3497 lm **
Beam Angle	18W : 10 Degree 23/30/35/40W : 18/26/38/50/65 Degree
Control Gear	Built-In Driver
Power Supply	220VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs
Remarks	* Value at 10 Degree ** Value at 38 Degree

Ordering Data


Model	Watt
PAL135J/MI/WH-18LED	18W
PAL135J/MI/WH-23LED	23W
PAL135J/MI/WH-30LED	30W
PAL135J/MI/WH-35LED	35W

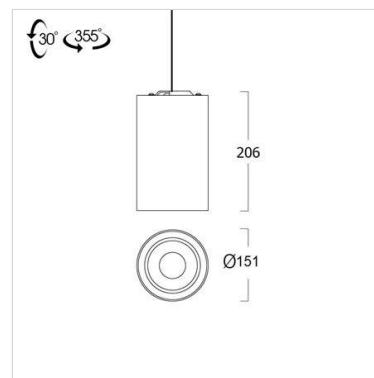

Related Products



PAL135J/BK






Honey comb

23W




30W

35W




18D

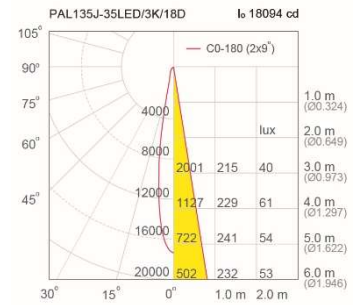




26D

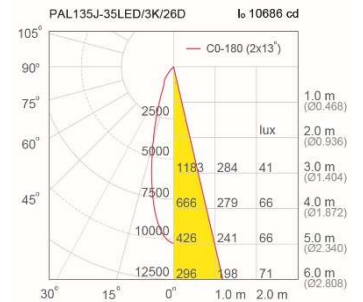

38D

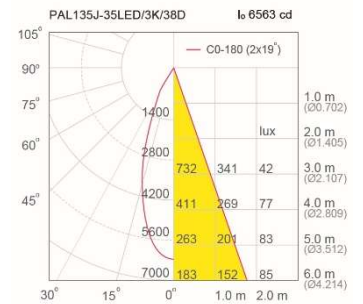

50D

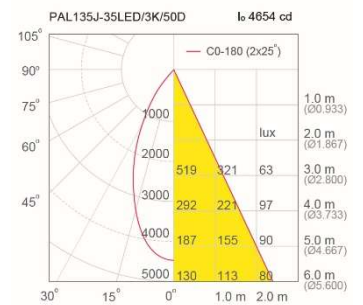

65D

