

LED Floodlight / Spotlight



 TIS FLL221/C/GS

Application


Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification


Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	147x300x361 mm.
Mounting	Clamp with pipe (OD 48/60 mm.)
Power	30W
Light Source	LED-COB
Colour Temperature	3000/4000K
Luminaire Output	3000 lm
Beam Angle	15/24/40 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	66
Luminaire Lifetime	50,000 hrs.
Equivalent	MH 70W

Ordering Data

Model	Watt
FLL221/C/GS-30LED	30W

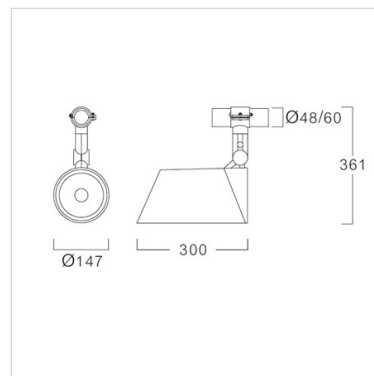

Related Products



Honey comb

