

LED Inground



 TIS INL201

Application


Inground luminaire is designed to accent or highlight trees,walls,columns,signboards,etc.

Specification


Housing	Die-cast aluminium body with grade 304 stainless steel flange
Finishing	Matt finished
Lens	Clear toughened glass
Gasket	Silicone rubber
Cable Entry	M12 nickel brass cable gland
Dimension	Dia.130x117 mm.
Cut Out	Dia.123 mm.
Mounting	Recessed in block out made of aluminium
Power	7W
Light Source	LED Module
Colour Temperature	3000K
Luminaire Output	805 lm
Beam Angle	25/40 degree
Control Gear	Separate driver
Power Supply	220-240VAC,50Hz
Insulation Class	III
IP Rating	67
Luminaire Lifetime	30,000 hrs.
Equivalent	MR16 50W

Ordering Data

Model	Watt
INL201-7LED	7W

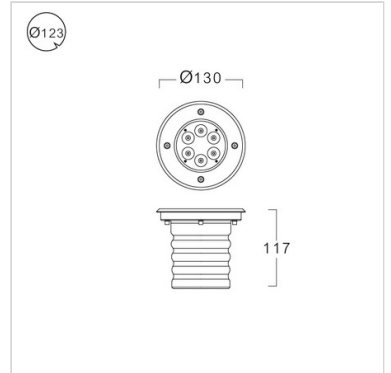

Related Products



Honey comb