

# LED Surface Downlight




TIS **SDL111**

## Application

Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

## Specification

<b>Housing</b>	Die-formed aluminium
<b>Finishing</b>	Powder coated in white or black
<b>Mounting</b>	Surface
<b>Power</b>	14/20W
<b>Light Source</b>	LED-COB
<b>Colour Temperature</b>	3000/4000/5000K
<b>CRI</b>	>90/ >90/ >80
<b>Lamp Output</b>	14W : 1540/1660/1805 lm 20W : 2200/2370/2575 lm
<b>Luminaire Output</b>	14W : 1489/1608/1742 lm 20W : 2024/2186/2368 lm
<b>Beam Angle</b>	65 degree
<b>Control Gear</b>	Built-in driver
<b>Power Supply</b>	220-240VAC,50Hz
<b>Power Factor</b>	>0,9
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	40,000 hrs.
<b>Equivalent</b>	14W : PAR30 75W 20W : 2200/2370/2575 lm

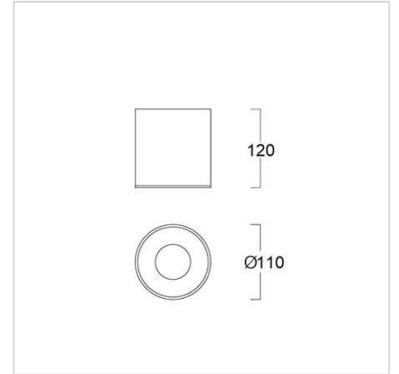

## Ordering Data

Model	Watt
SDL111/WH-14LED	14W
SDL111/WH-20LED	20W

## Related Products

