

LED Recessed Downlight



TIS RAL83

Application





Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification



Housing	Die-cast aluminium
Finishing	Powder coated in white / black
Mounting	Recessed
Power	1 lamp : 14/20W 2 lamps : 28/40W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	14W : 1333/1397/1530 lm 20W : 2232/2430/2538 lm 14W : 1046/1096/1200 lm* 20W : 1790/1935/2005 lm*
Luminaire Output	
Beam Angle	14W : 15/24/36/60 Degree 20W : 18/24/36/60 Degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	20
Luminaire Lifetime	25,000 hrs.
Equivalent	MR16 50W
Remarks	*Value at 24 Degree

Ordering Data

Model	Watt
RAL83/WH-14LED	14W
RAL83/WH-20LED	20W
RAL83/WH-2x14LED	28W
RAL83/WH-2x20LED	40W

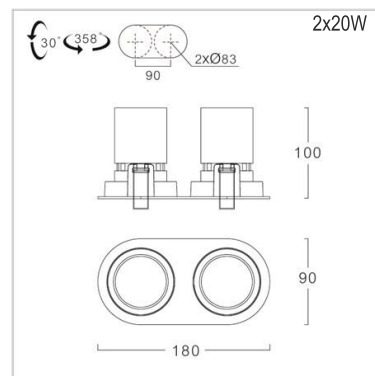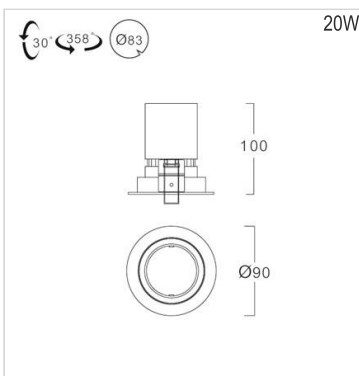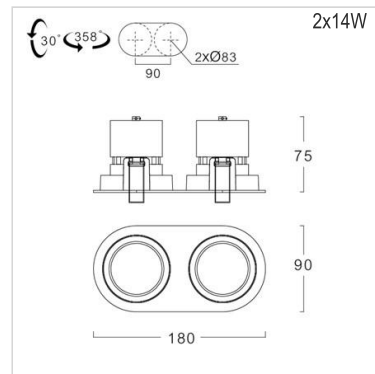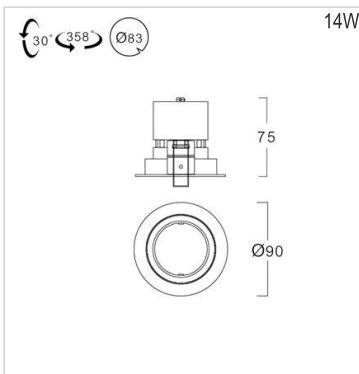



Related Products

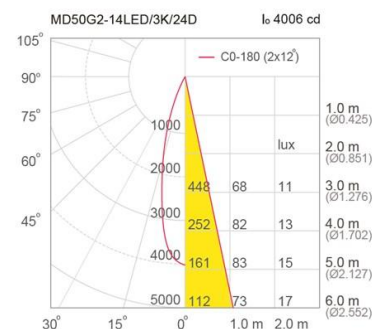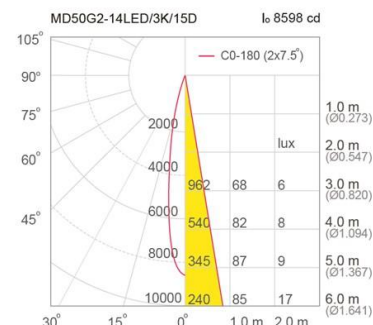



MD50-14W

MD50H-20W



15D / 18D

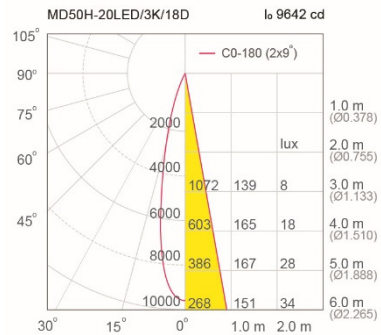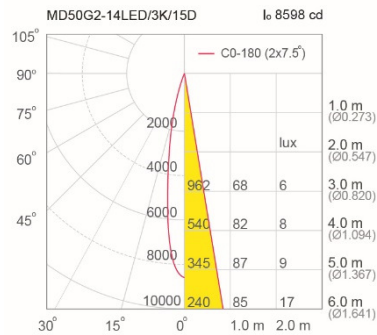

24D

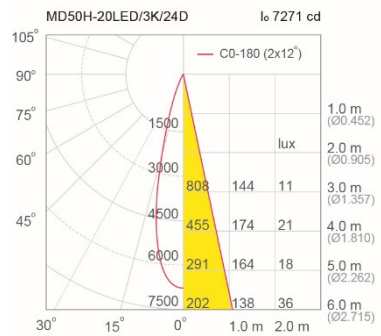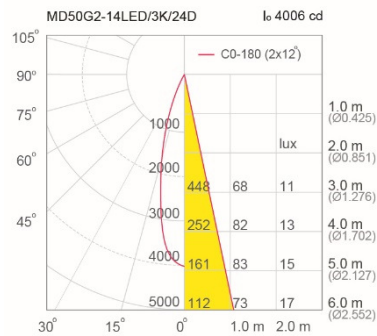

36D

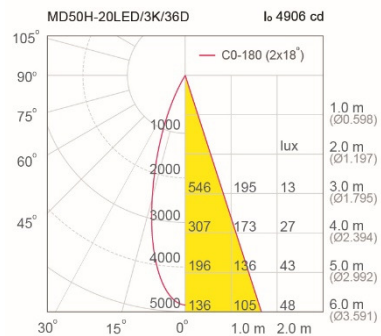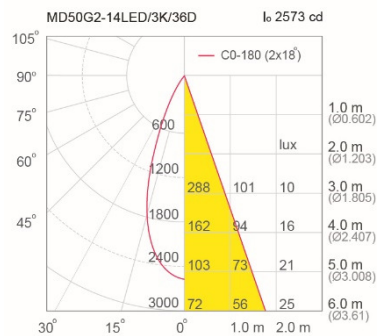

60D

